

## Micro40 Slot Accent SuperSpot10°



40mm (1.57") overall diameter. Fully recessed Micro40 downlight for interior installation. Available with standard trim kit or plaster-in kit for flush appearance. 20° with standard ceiling thickness with no chamfer (Diagram 1), 35° tilt max with chamfered ceiling (Diagram 2), When using trimless kit max tilt 10° (Diagram 3). Family of matching products also available. Required depth height + 10mm^

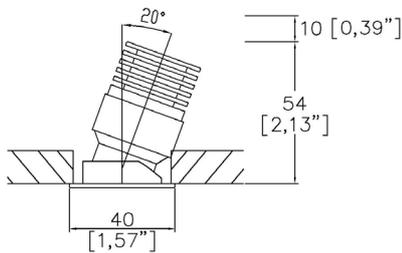


Diagram 1  
M43-SA-TR  
Cut-out 36mm Ø

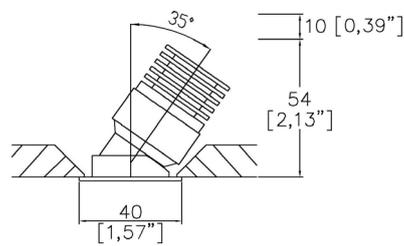


Diagram 2  
M43-SA-TR  
Cut-out 36mm Ø

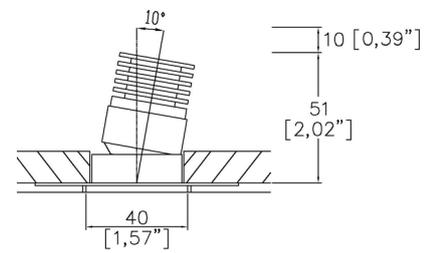


Diagram 3  
M43-SA-TL  
Cut-out 37mm Ø

LED Source	LED
CCT	3000K
Drive Current	350mA
Power inc Driver	4.65W
Beam Angle	10°
Delivered Lumens	68
Delivered Intensisty cd	2026
Efficacy lm/w	15
Forward Volt	11.3V
CRI	≥90 CRI

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code: **M43-SA-SS** - [ ] - [ ] - [ ] - 10 - 350 - [ ]

Fixture  
M43-SA-SS      Micro40 Slot Accent SuperSpot10°

Installation  
TR      Trim  
TL      Trimless

CCT  
27      90 CRI 2700K  
30      90 CRI 3000K  
40      90 CRI 4000K

Finish  
WH      White  
BK      Black

Beam  
10      10°

Drive Current  
350      350mA

Protocol  
S      Non-Dim  
A      Analogue (0-10v)  
P      Phase  
D      DALI  
B      Bluetooth\*\*



.....  
**Technical Details**

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.


This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE


**Light efficiency:**



**Light quality:**



**Color temperature:**

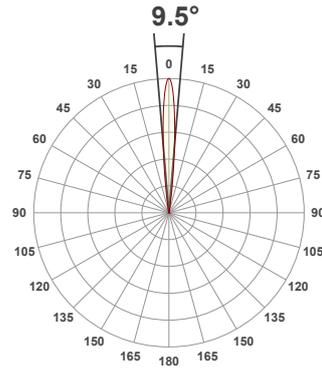

**Product name:**

**M43-SA-SS-30-10 350mA**


**Item number:**

**Micro40 Slot Accent SuperSpot  
3000K 10deg 350mA**


**Delivered information for above  
fixture and LED combination.**

**Output: 68.0 Lumen    Peak intensity: 2026 cd    Power consumption: 4.7**


**CRI R values**

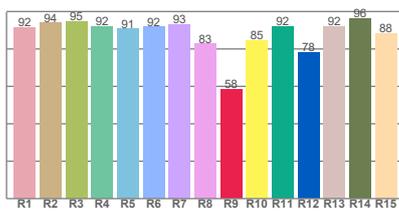

**TM30 C Values**

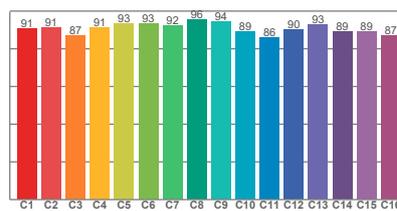


**Color vector graphics**



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	91.3	58.3	90.7	100.6	89.5	0.437	0.404	0.247	0.346	-0.0002

**Beam details**

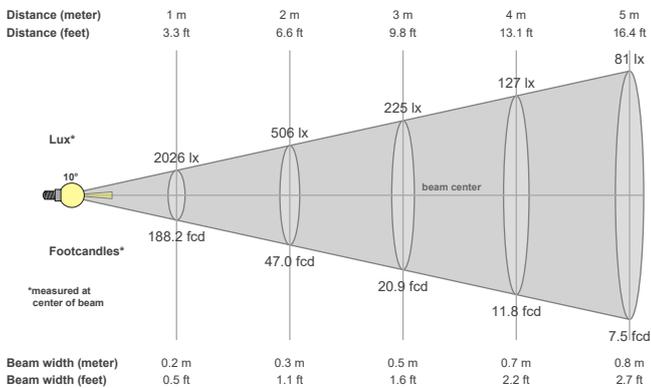

**Beam angels**

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
<b>9.5°</b>	<b>16.5°</b>	<b>21.1°</b>

**Beam intensities**

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
<b>2026 cd</b>	<b>98.5%</b>	<b>97.4%</b>

**Beam intensities from 1-20m**

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2026lx	506lx	225lx	127lx	81lx	56lx	41lx	32lx	25lx	20lx	17lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx	5lx
188.2fcd	47fcd	20.9fcd	11.8fcd	7.5fcd	5.2fcd	3.8fcd	2.9fcd	2.3fcd	1.9fcd	1.6fcd	1.3fcd	1.1fcd	1fcd	0.8fcd	0.7fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.9  
4000K = 1.08