#### lucent




QUANTUM Module

#### ProSpex PlusMini Fixed Downlight Trimless





80mm (3.15") overall trimless diameter. Available with standard trim kit or plaster-in kit options. Family of matching products also available. Required depth = height + 25mm^



750+LED-TL/PCZ Cut-out 82mm Ø

LED Source	LED51/Q-HE	LED51/Q-HE	LED51/Q-HE	LED51/Q-HE	
CCT	3000K	3000K	3000K	3000K	
Drive Current	200mA	200mA	200mA	200mA	≥75 D Com
Power inc Driver	8.0W	8.0W	8.0W	8.0W	
Beam Angle	NF (18°)	MF (25°)	FL(32°)	WFL (52°)	
Delivered Lumens	1025	1076	1040	1050	≥95 Com
Delivered Intensisty cd	7191	4873	3285	1424	0.01
Delivered Lumens per circuit watt	128	135	130	136	
Forward Volt	33V	33V	33V	33V	
CRI	≥93 CRI	≥93 CRI	≥93 CRI	≥93 CRI	≥ 8 0 Com


Lumen output for other CCTs use the following multification factors to the 3000K figures above: 2700K x 0.98. 4000K x 1.02

# lucent<sub>®</sub>

Project Ref:				Location Ref	•					
Fixture Ord	ler Code:	750+LED-TL	-							
Fixture – 750+LED-TL	Plus Mini Coni	cal Fixed Trimless	with LED51							
Installation 750+TL 750+PCZ	TL trimless kit PCZ Plaster kit									
Finish WH BK RAL ABR1 ABZ1 PCH1 PNK1 PBR1	White Black Custom RAL F Antique Brass Antique Bronz Polished Chro Polished Nicke Polished Brass	re me el								
IP Rating 44 54	IP44 IP54									
750- Trimi Front fittu	+PCZ ess Kit ng, full skim	750 Triml Rear fitting	D+TL ess Kit	m						
Module Ore	der Code:	LED51/Q-HE								
LED – LED51/Q-HE	LED50 ONE G	QUANTUM HE								
CCT - 27 30 40	2700K 3000K 4000K***									
Beam – NF MF FL WFL	Narrow Flood Medium Flood Flood Wide Flood	I								
***contact Luce	ent for availabilit	у								
Driver Opti Protocol – S P D B	Non-Dim Analogue (0-10 Phase DALI Bluetooth**	] ]v)		Emergency Emergency - E ED ES	·	nr Emergency nr DALI Self Tes nr Self Test				

### lucent

#### **Finish selection**

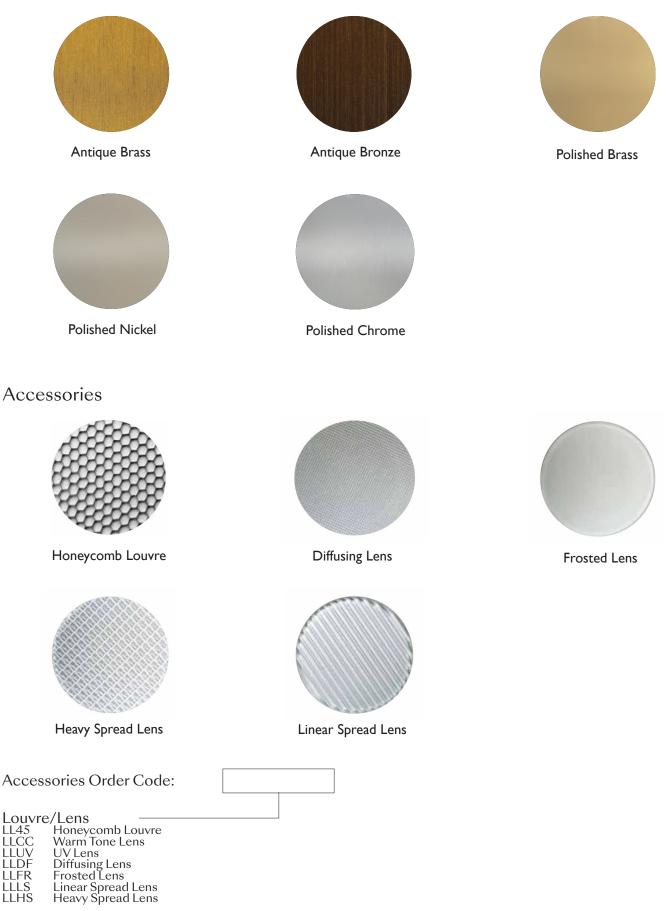

# lucent

#### **Technical Details**

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.