


## VistaMini Flood Wall Mount or Tree Mount



32mm (1.97") overall diameter. IP65 constant voltage exterior grade surface mounted fully adjustable ultra wide flood light. 90° Pivot and 359° rotation.

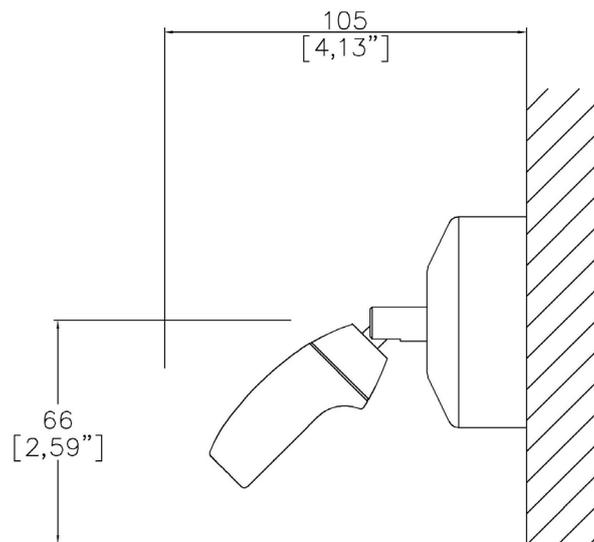

VF002-W/T

LED Source	LED
CCT	2700K
Supply Voltage	24v
Power	1.5W
Beam Angle	120°
Delivered Lumens	119
Delivered Intensity cd	44
Efficacy lm/w	80
CRI	≥90 CRI
Ingress Protection	IP65

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code: VF002 - 27 - BK -   -  

Fixture  
VF002

VistaMini Flood

CCT  
27

2700K

Finish  
BK

Black

Mount  
W  
T

Wall Mount  
Tree Mount

Protocol  
S  
A  
P  
D

Non-Dim  
Analogue (0-10v)  
Phase  
DALI

Please refer to installation instruction for wiring diagram


All Lucent Vista products are supplied with a 5m cable

This product has undergone a 1000 hour salt spray test in accordance with ASTM B117

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

### Accessories



TH381

Accessories Order Code:

Accessories  
TH381

IP68 Connector

### Technical Details

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE


**Light efficiency:**



**Light quality:**



**Color temperature:**

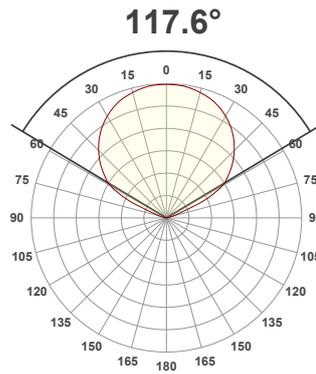

Product name:

**VistaMini Flood, 2700K, 120°**


Item number:

**VF002-27**


**Delivered information for above fixture and LED combination.**

**Output: 119 Lumen    Peak intensity: 43.6 cd    Power consumption: 1.5**


**CRI R values**

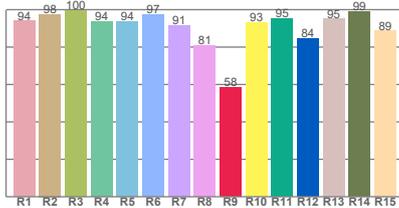

**TM30 C Values**

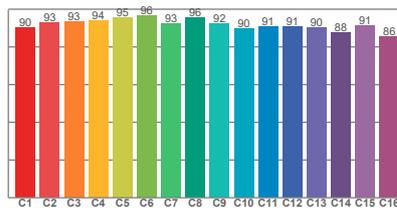


**Color vector graphics**



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2700 K	93.5	58.4	91.8	97.2	91.4	0.460	0.411	0.260	0.352	0.0010

**Beam details**

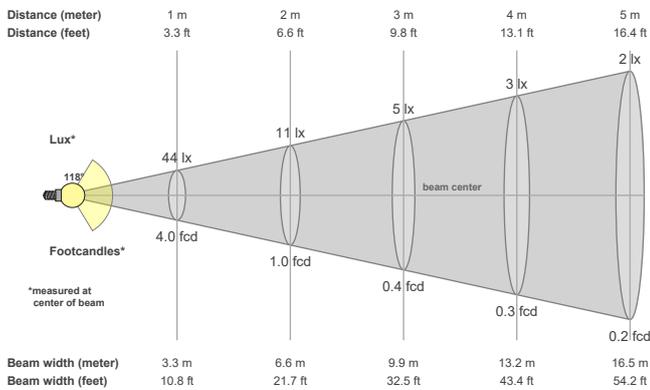

**Beam angels**

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
117.6°	141.2°	155.4°

**Beam intensities**

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
43.6 cd	86.7%	58.2%

**Beam intensities from 1-20m**

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
44lx	11lx	5lx	3lx	2lx	1lx	1lx	1lx	1lx	0lx										
4fcd	1fcd	0.4fcd	0.3fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0fcd											

The above information is for 2700K colour temperature.