


## EasyFit Edge3.5 Wallwash



3.62" (92mm) overall diameter. Available with a separate installation kit with overlap flange or mud-in kit for seamless flush finish. Fixed and adjustable version available. Supplied with a remote driver box and a plug and play tethered power supply.

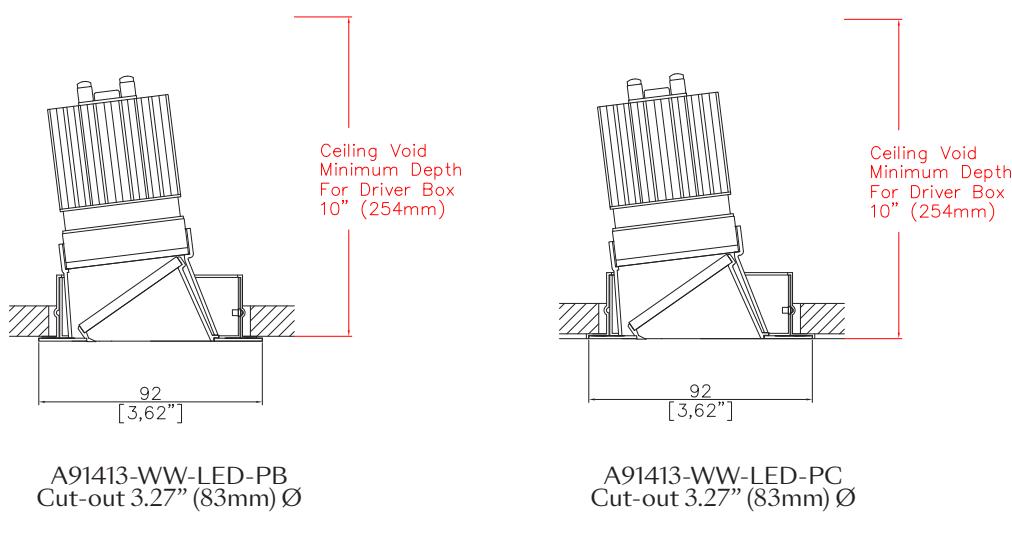

LED Source	ALED51/Q-HO
CCT	3000K
Drive Current	350mA
Power inc Driver	14.0W
Beam Angle	WFL (48°)
Delivered Lumens	671
Delivered Intensity cd	887
Delivered Lumens per circuit watt	48
Forward Volt	34V
CRI	≥90 CRI

Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 3500K x 1.01 / 4000K x 1.02.

**Ceiling void minimum depth for driver box: 10.00" (254mm)**

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Specify fixture part number (All boxes must be filled in to correctly order)

A91413-WW-LED	<input type="text"/>	<input type="text"/>	<input type="text"/>	ALED51/Q-HO	<input type="text"/>	<input type="text"/>	ALEZ1-120-277	<input type="text"/>	<input type="text"/>
Installation									
TR	Installation kit with overlap flange								
PC	Mud-in kit for seamless flush finish								
Finish									
WH	White								
BK	Black								
RAL	Custom*								
ABRI	Antique Brass								
ABZ1	Antique Bronze								
PCH1	Polished Chrome								
PNK1	Polished Nickel								
PBRI	Polished Brass								
Location									
DP	Damp								
WT	Wet								
Supplied for dry location as standard									
LED Type									
ALED51/Q-HO	LED50 ONE Quantum High Output								
CCT									
27	2700K								
30	3000K								
35	3500K (I)								
40	4000K (I)								
(I) contact Lucent for availability									
Beam Angles									
WFL	Wide Flood								

EasyFit  
ALEZ1-120-277      Lucent EasyFit 120-277V

Dimming Protocol

SLA      EldoLED Analog (0-10V) (0.1% Dimming)  
 ECA      EldoLED Analog (0-10V) (1% Dimming)  
 SLD      EldoLED DALI (0.1% Dimming)  
 ECD      EldoLED DALI (1% Dimming)  
 PTB15     ERP PTB 0-10V/Phase (1% Dimming) (PHASE ONLY 120V)  
 FTX15     Hatch Foundation 0-10V/Phase (1% Dimming)

Contact Lucent factory for Lutron LED Driver options

Louvre/Lens


XX      Not required  
 LL45     Honeycomb



NIC - No contact with insulation

Ceiling void minimum depth for driver box: 10.00" (254mm)

### Fixture and EasyFit driver box

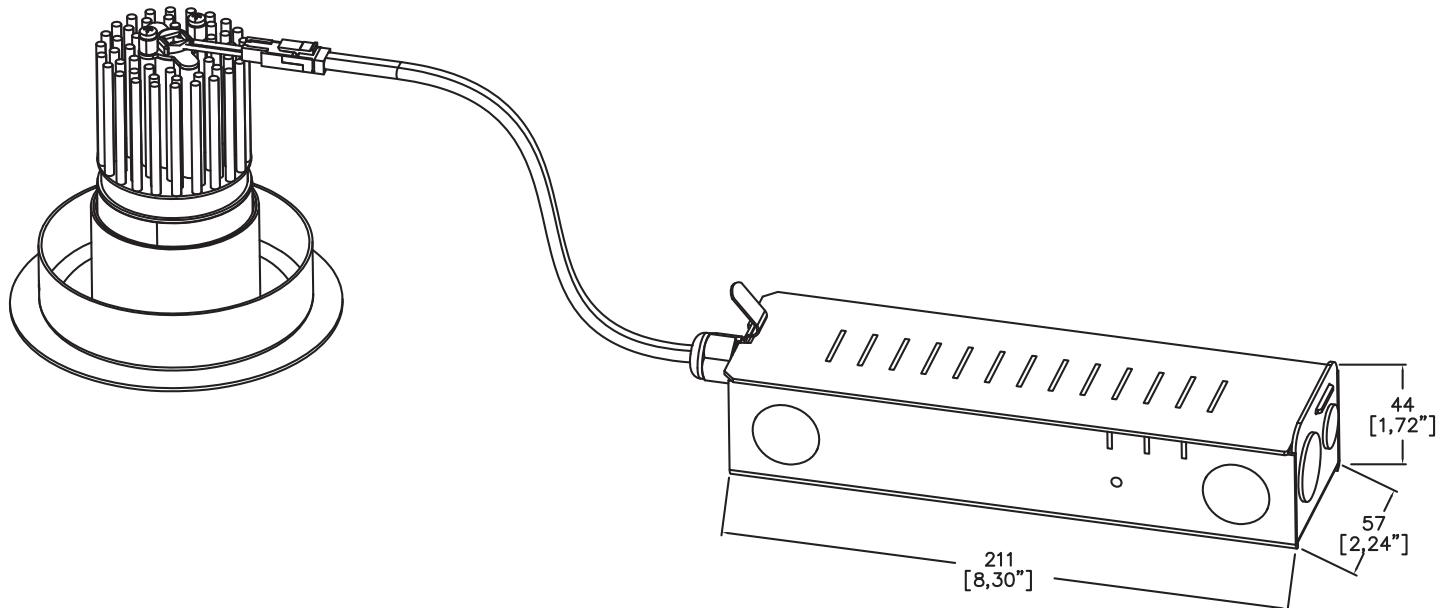

### Installation Kits




Installation kit with overlap flange



Mud-in kit for seamless flush finish

Ceiling void minimum depth for driver box: 10.00" (254mm)


Finish selection



Antique Brass



Antique Bronze



Polished Brass




Polished Nickel



Polished Chrome

Accessories



Honeycomb Louvre

## Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

^ Depth indicated is the minimum recess depth for the driver to be installed through the luminaire cut out.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

Location. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

