




ProSpex MicroTrim Accent

TM65.2	7kgCO2e
TM66	2.4 CEAM



70mm (2.76”) overall diameter. Available with standard trim kit. Family of matching products also available.

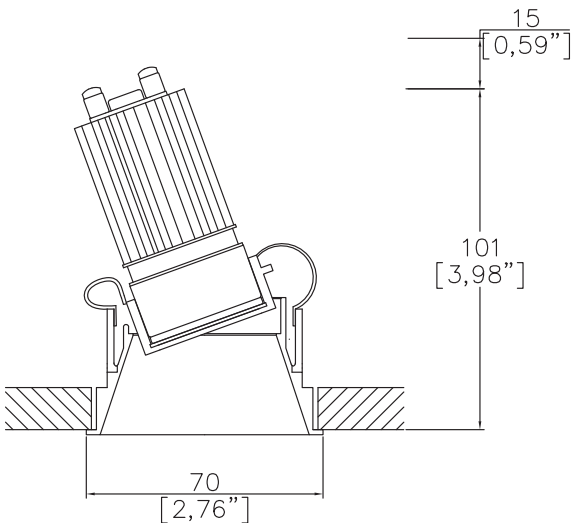

MT70210-TR1
Cut out Ø65mm
Required depth height + 15mm^

LED Source	LED35/Q-HO	LED35/Q-HO	LED35/Q-HO	LED35/Q-HO
CCT	3000K	3000K	3000K	3000K
Drive Current	250mA	250mA	250mA	250mA
Power inc Driver	9.7W	9.7W	9.7W	9.7W
Beam Angle	NF (18°)	MF (24°)	FL (34°)	WFL (55°)
Delivered Lumens	940	942	1010	893
Delivered Intensisty cd	6285	4636	2807	1178
Delivered Lumens per circuit watt	97	97	104	92
Forward Volt	33V	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI



Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 4000K x 1.02.

Project Ref: Location Ref:

Fixture Order Code: MT70210 - TR1 - - - 0

Fixture
MT70210

MicroTrim Accent with LED35

Installation
TR1

Trim for Existing Ceilings

Finish
WH02
BK02
RAL*
ABR1
ABZ1
PCH1
PNK1
PBR1

Textured Matt White RAL 9010
Textured Matt Black RAL 9005
Custom RAL Colour*
Antique Brass
Antique Bronze
Polished Chrome
Polished Nickel
Polished Brass

IP Rating
54
65

IP54
IP65

Fire Rating
0

No Fire Rating

Module Order Code: LED35/Q-HO - -

LED
LED35/Q-HO

LED35 QUANTUM High Output

CCT
27
30
40

2700K
3000K
4000K⁽³⁾

Beam
NF
MF
FL
WFL

Narrow Flood
Medium Flood
Flood
Wide Flood

⁽³⁾ contact Lucent for availability

Driver Options: Emergency Options:

Protocol
S
A
P
D
B

Non-Dim
Analogue (0-10v)
Phase
DALI
Bluetooth**

Emergency
E
ED
ES

Maintained 3hr Emergency
Maintained 3hr DALI Self Test
Maintained 3hr Self Test


Finish selection




Antique Brass




Antique Bronze



Polished Brass




Polished Nickel




Polished Chrome

Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

- Louvre/Lens
- LS45

LSDF

LSFR

LSLS

LSHS
- Honeycomb Louvre

Diffusing Lens

Frosted Lens

Linear Spread Lens

Heavy Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE