

## Installation Instructions ProSpex Focus 60

Instructions applicable for the following luminaires:

### ProSpex Focus 60:

FIXED - 060-LED/XIC/16/GU

ADJ - 063-LED/XIC/16/GU


### ProSpex Focus 60IP54

FIXED - 060-LED/XIC/16/GU-54

ADJ - 063-LED/XIC/16/GU-54

Cut hole as follows:

Focus 60	62mmØ
----------	-------

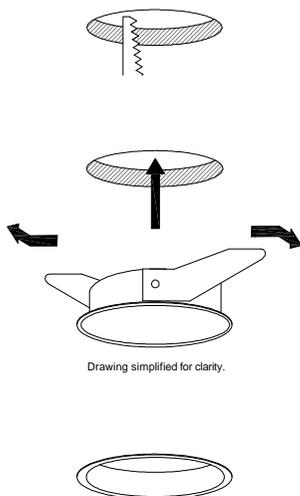



Fit the installation kit into the ceiling, press spring blades toward the body and carefully insert into the ceiling cut-out. Push the installation kit up until trim is flat against the finished ceiling. (Tip, for additional strength bond the ring into the ceiling).

The installation ring is now installed.

### MR - GU versions:



Refer to instructions supplied with the transformer/control gear for connection details



Install control gear/transformer where applicable through the ceiling cut-out.



Wire equipment according to the installation instructions provided/printed on the equipment to the terminal block mounted on fixtures bracket.

(For GU10 versions please take mains supply directly to the plug/socket provided).

Insert any lenses/louvres into the lamp/accessory holder. Then install the lamp. Lamp retaining springs will hold everything in place.

### LED - XIC versions:

Refer to instructions supplied with the transformer/control gear for connection details

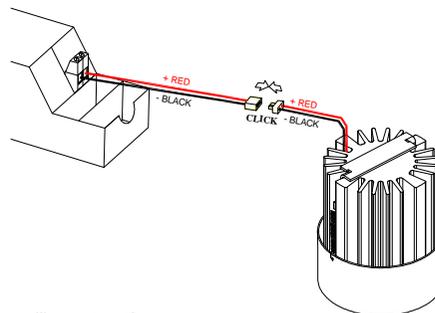



Install LED Drivers through the ceiling cut-out\*.



Wire Primary and, if required, the dimming control input of the equipment according to the installation instructions provided/printed on the driver. Ensuring the driver is not energised, connect the LED lead to the flying lead from the driver.

Observe the LED warning label attached to the modules cable. remove label prior to installation (removal of the label implies understanding and acknowledgement of the conditions for installation).

\* Some LED drivers will not fit through the luminaire cut-out, and will require remote mounting. Please consult Lucent Lighting if required.



LED modules will normally be factory fitted in the luminaire. However if the module needs to be removed from the fixture slide the LED brace to one side exposing the hook end of the spring. Detach the spring, remove the brace and remove the LED module from the luminaire. Reverse for re-assembly

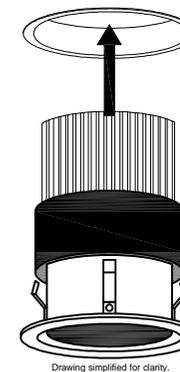

Drawing simplified for clarity.

To install the luminaire into the installation kit, carefully insert the body into the ring until the springs clip into position and the fixture is flat to the ceiling.



Installation is complete.



Adjustable versions can be aimed.

The body can be rotated in the installation kit and the central tube tilted to suit.

Note:

The IP54 version must be tilted before installation as the fixture has a bottom glass and the adjustment happens above this.