
lucent



200/2-LED-TR Up to 35° tilt Cut-out 106mm Ø Trim kit

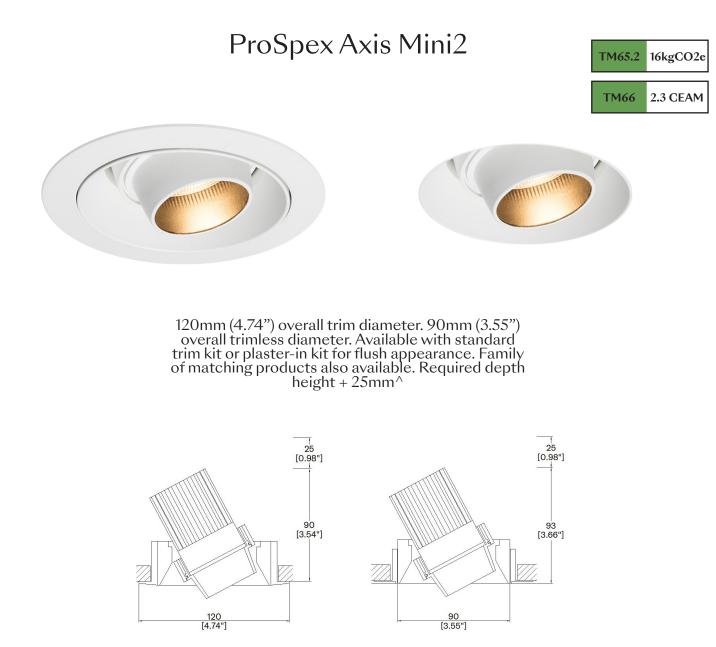

LED Source	LED51/U	LED51/U	LED51/U	LED51/U
CCT	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA
Power inc Driver	13.6W	13.6W	13.6W	13.6W
Beam Angle	12°	24°	38°	55°
Delivered Lumens	673	697	832	675
Delivered Intensisty cd	8489	3952	2201	991
Efficacy lm/w	50	51	61	50
Forward Volt	33V	33V	33V	33V
CRI	≥98 CRI	≥98 CRI	≥98 CRI	≥98 CRI


Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.94 / 4000K x 1.03

lucent_®

Project Ref:		Location Ref:	
Fixture Ord	er Code: 200/2-LED –		
Fixture – 200/2-LED Installation – TR TL	Axis Mini2 with LED51 Trim Trimless		
Finish – WH BK RAL* ABR1 ABZ1 PCH1 PNK1 PBR1	White RAL 9010 Black RAL 9005 Custom RAL Colour* Antique Brass Antique Bronze Polished Chrome Polished Nickel Polished Brass		
LED Order	Code: LED51/U –		
LED – LED51/U	LED50 ONE ULTRA		
CCT – 27 30 40***	98 CRI 2700K 98 CRI 3000K 98 CRI 4000K***		
Beam – 12 24 38 55	12° 24° 38° 55°		
***contact Luce	nt for availability		
Driver Opti Protocol – S A P D B	Ons: Non-Dim Analogue (0-10v) Phase DALI Bluetooth**	Emergency Options: Emergency ED ED ES Maintained 3hr Emergency Maintained 3hr DALI Self Test Maintained 3hr Self Test	

lucent

Finish selection

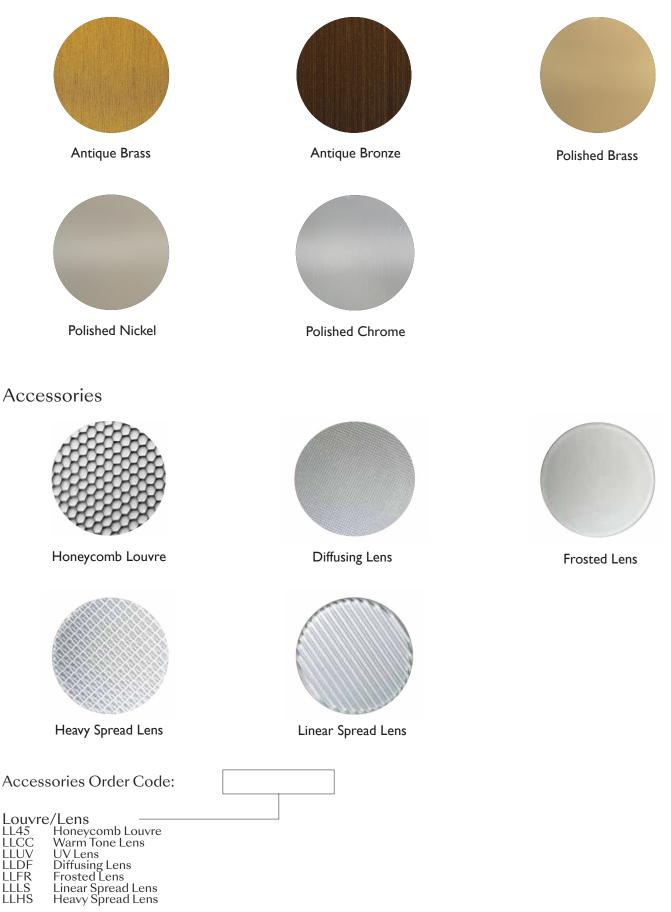

lucent

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.