## ProSpex TubeLED Micro




TM66 2.2 CEAM









40mm (1.57") overall diameter. Miniature low voltage LED tubular spotlight. Available with monopoint mounting or magnetic track adaptor. Family of matching products also available.



6100-LED-RMP Cut out 35mm Ø



6100-LED-TMP Cut out 35mm Ø




6100-LED-SMP Cut out 12mm Ø

LED Source	LED	LED	LED
CCT	3000K	3000K	3000K
Drive Current^	350mA	350mA	350mA
Power inc Driver	7.4W	7.4W	7.4W
Beam Angle	15°	24°	36°
Delivered Lumens	511	478	439
Delivered Intensisty cd	3478	2348	1344
Efficacy Im/w	69	64	59
Forward Volt	18V	18V	18V
CRI	≥90 CRI	≥90 CRI	≥90 CRI

Apply these factors to 3000K for lumen output of other CCTs:  $2200K \times 0.65 / 2400K \times 0.69 / 2700K \times 0.941 / 4000K \times 1.065$ .



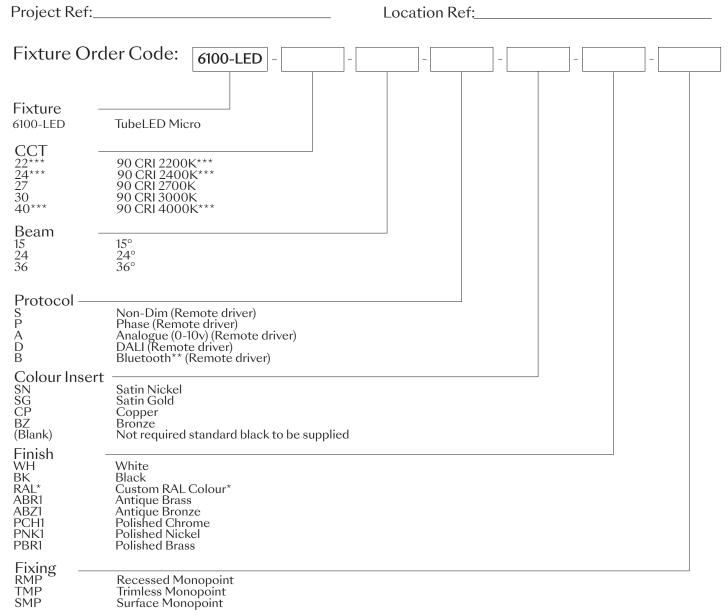

Please refer to installation instruction for wiring diagram

Issued: 03/24

<sup>\*\*\*</sup>contact Lucent for availability

# <u>lucent</u><sub>®</sub>

### Finish selection



Antique Brass



Antique Bronze



Polished Brass



Polished Nickel



Polished Chrome

### Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens

Issued: 11/24



Heavy Spread Lens



Linear Spread Lens

#### Accessories Order Code:

Fixture
---------

LS45-33mm Honeycomb LSCC-33mm Warm Tone LSUV-33mm UV

LSDF-33mm Solite/Diffusing LSFR-33mm Frosted Lens LSLS-33mm Linear Spread LSHS-33mm Heavy Spread



#### **Technical Details**

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

- \*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.
- ^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

Issued: 11/24