
lucent

ProSpex Plus Mini Conical Accent Trimless





80mm (3.15") overall trimless diameter. Available with standard trim kit or plaster-in kit options. Family of matching products also available. Up to 30° tilt. Required depth = height + 25mm^



753+LED-TL/PCZ Cut-out 82mm Ø Trimless kit

LED Source	LED51WD	LED51WD
CCT	3000K	3000K
Drive Current	500mA	500mA
Power inc Driver	17.1W	17.1W
Beam Angle	28°	39°
Delivered Lumens	695	778
Delivered Intensisty cd	1999	1334
Efficacy Im/w	41	45
Forward Volt	29.1V	29.1V
CRI	≥95 CRI	≥95 CRI
Test results at full output		


Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.93.

lucent_®

Project Ref:_	Location Ref:	
Fixture Ord	der Code:	
Fixture - 753+LED-TL	Plus Mini Conical Accent Trimless with LED51	
Installation 750+TL 750+PCZ Finish	TL trimless kit PCZ Plaster kit	
WH BK RAL* ABR1 ABZ1 PCH1 PNK1 PBR1 ID Poting	White RAL 9010 Black RAL 9005 Custom RAL Colour* Antique Brass Antique Bronze Polished Chrome Polished Nickel Polished Brass	
IP Rating 44 54	IP44 IP54	
750+PCZ750+TL Trimless KitTrimless Kit Front fitting, full skim Rear fitting, partial skim		
LED Order	Code: LED51WD –	
LED LED51WD	LED50 ONE Ambiance WarmDim	
CCT 2720 3020	2700K - 2000K 3000K - 2000K	
Beam 28 39	28° 39°	
Driver Opt	ions:	
Protocol S A P D B	Non-Dim Analogue (0-10v) Phase DALI Bluetooth**	

lucent

Finish selection

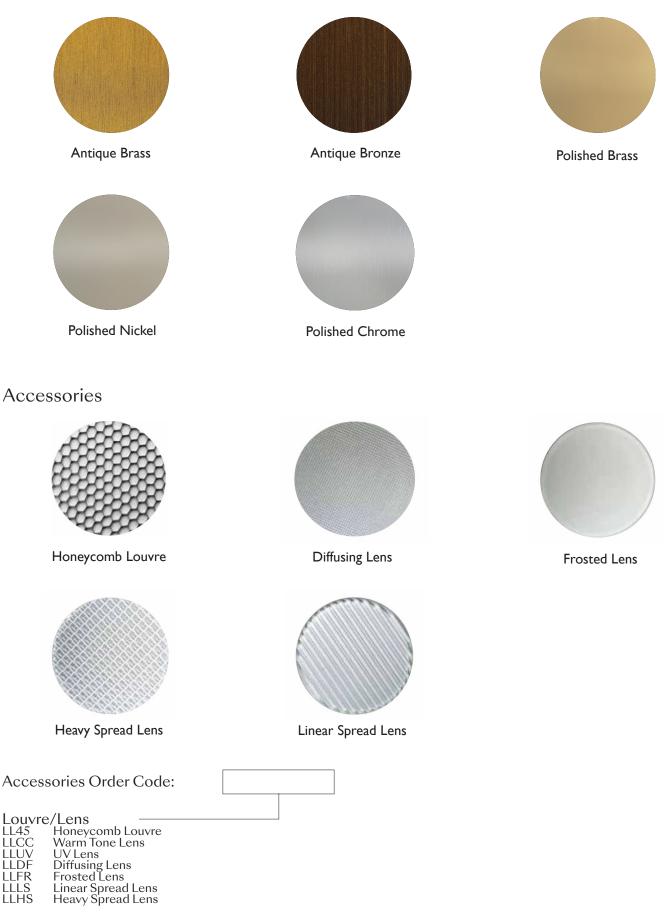

lucent

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE