




# ProSpex Soft70 Fixed

TM65.2 9kgCO2e


TM66 2.3 CEAM



90mm (3.54") overall trim diameter. 70mm (2.76") overall trimless diameter. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available. Required depth height + 25mm^

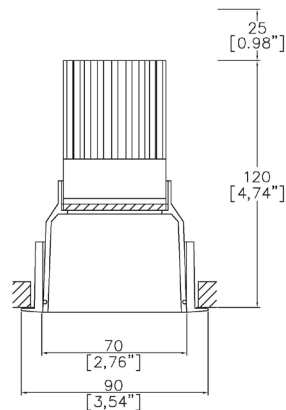

070-LED-TR-65  
Cut-out 79mm Ø  
Trim kit

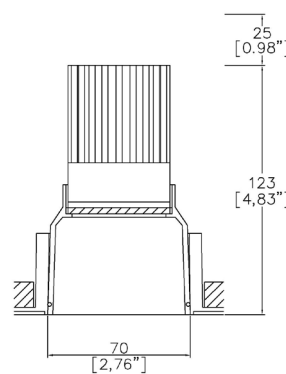

070-LED-TL-65  
Cut-out 79mm Ø  
Seamless flush appearance

LED Source	LED51/U	LED51/U	LED51/U
CCT	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA
Power inc Driver	13.6W	13.6W	13.6W
Beam Angle	12°	24°	38°
Delivered Lumens	814	768	890
Delivered Intensisty cd	10669	3923	2231
Efficacy lm/w	60	56	65
Forward Volt	33V	33V	33V
CRI	≥98 CRI	≥98 CRI	≥98 CRI

Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.94 / 4000K x 1.03

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code:  -  -  -  -

Fixture  
070-LED      Soft70 Fixed with LED51

Installation  
TR      Trim  
TL      Trimless

Body Finish  
WH      White  
BK      Black  
RAL      Custom RAL Colour\*

Trim Finish (Leave blank if trimless)  
WH      White  
BK      Black  
RAL      Custom RAL Colour\*

IP Rating  
65      IP65



LED Order Code:  -  -

LED  
LED51/U      LED50 ONE ULTRA

CCT  
27      98 CRI 2700K  
30      98 CRI 3000K  
40\*\*\*      98 CRI 4000K\*\*\*

Beam  
12      12°  
24      24°  
38      38°  
55      55°


\*\*\*contact Lucent for availability

Driver Options:

Protocol  
S      Non-Dim  
A      Analogue (0-10v)  
P      Phase  
D      DALI  
B      Bluetooth\*\*

Emergency Options:

Emergency  
E      Maintained 3hr Emergency  
ED      Maintained 3hr DALI Self Test  
ES      Maintained 3hr Self Test




**Honeycomb Louvre**



**Diffusing Lens**



**Frosted Lens**



**Heavy Spread Lens**



**Linear Spread Lens**



**Warm Tone**

Accessories Order Code:

- |             |                    |
|-------------|--------------------|
| Louvre/Lens |                    |
| LL45        | Honeycomb Louvre   |
| LLCC        | Warm Tone Lens     |
| LLUV        | UV Lens            |
| LLDF        | Diffusing Lens     |
| LLFR        | Frosted Lens       |
| LLLS        | Linear Spread Lens |
| LLHS        | Heavy Spread Lens  |

**Technical Details**

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE