


# TubeLED Mini SuperSpot

TM65.2 11kgCO2e

TM66 2.2 CEAM



60mm (2.36") overall diameter LED spotlight. Available with monopoint mounting, and track adaptor. Also available with Low voltage track adaptor. Family of matching products also available.

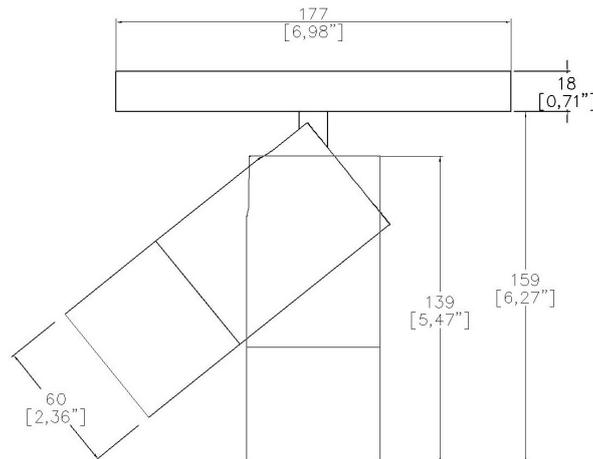

7100/SS-LVTR

Driver Location	Integral to Track adaptor
LED Source	LED
CCT	3000K
Drive Current	1000mA
Power inc Driver	14.5W
Beam Angle	7°
Delivered Lumens	722
Delivered Intensity cd	26123
Efficacy lm/w	59
Forward Volt	12.3V
CRI	≥90 CRI

Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 4000K x 1.02.

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code: **7100/SS** - [ ] - **7** - [ ] - [ ] - [ ] - **LVTR**

Fixture  
7100/SS

TubeLED Mini SuperSpot

CCT

27  
30  
40\*\*\*

90 CRI 2700K  
90 CRI 3000K  
90 CRI 4000K\*\*\*

Beam  
7

7°

Protocol

S  
A  
D

Non-Dim  
0-10V  
DALI

Colour Insert

SN  
SG  
CP  
BZ  
(Blank)

Satin Nickel  
Satin Gold  
Copper  
Bronze  
Not required standard black to be supplied

Finish

WH  
BK  
RAL  
ABR1  
ABZ1

White  
Black  
Custom RAL Finish\*  
Antique Brass  
Antique Bronze

Fixing  
LVTR

Low Voltage Track Adaptor

\*\*\*contact Lucent for availability

Finish selection




Antique Brass



Antique Bronze

Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens

- LL45 Honeycomb Louvre
- LLCC Warm Tone Lens
- LLUV UV Lens
- LLDF Diffusing Lens
- LLFR Frosted Lens
- LLLS Linear Spread Lens
- LLHS Heavy Spread Lens

## Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE