

## lucent

### ProSpex Plus Conical Accent Trimless Twin

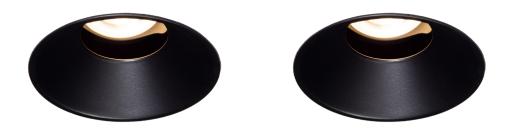

98mm (3.86") overall trim diameter. Up to 45° loackable tilt and 350° lockable rotation. Supplied with plaster-in kit for flush appearance. Family of matching products also available. Required depth height + 25mm^



A093+LED-TL Cut-out 4" (102mm) Ø

### Fixture Output Data

### LED51/2

LED Source	LED51/2	LED51/2	LED51/2	LED51/2
CCT	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA
Power inc Driver	13.6W	13.6W	13.6W	13.6W
Beam Angle	12°	24°	38°	60°
Delivered Lumens	573	705	840	722
Delivered Intensisty cd	7905	3874	2481	1159
Efficacy Im/w	42	52	62	53
Forward Volt	33V	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI

LED51/U

LED Source	LED51/2	LED51/2	LED51/2	LED51/2
CCT	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA
Power inc Driver	13.6W	13.6W	13.6W	13.6W
Beam Angle	12°	24°	38°	60°
Delivered Lumens	660	633	744	626
Delivered Intensisty cd	9725	3821	1813	990
Efficacy Im/w	49	47	55	46
Forward Volt	33V	33V	33V	33V
CRI	≥98 CRI	≥98 CRI	≥98 CRI	≥98 CRI

### LED51SS

LED Source	LED51SS
CCT	3000K
Drive Current	500mA
Power inc Driver	6.75W
Beam Angle	7°
Delivered Lumens	364
Delivered Intensisty cd	15333
Efficacy lm/w	54
Forward Volt	11.5V
CRI	≥90 CRI

Above data is for singular fixture

 $Copyright @ 2015 \ Lucent \ Lighting \ Inc.$ 

### LED51WD

LED Source	LED51WD	LED51WD
CCT	3000K	3000K
Drive Current	500mA	500mA
Power inc Driver	17.1W	17.1W
Beam Angle	28°	39°
Delivered Lumens	540	579
Delivered Intensisty cd	1979	1257
Efficacy Im/w	32	34
Forward Volt	29.1V	29.1V
CRI	≥95 CRI	≥95 CRI
Test results at full output		

LED51TW

LED Source	LED51TW	LED51TW
CCT range 5000K-2000K	@ 3000K	@ 3000K
Drive Current (max per channel)	700mA	700mA
Power inc Driver Max	15.1W	15.1W
Beam Angle	25°	35°
Delivered Lumens	472	528
Delivered Intensisty cd	2026	1174
Efficacy lm/w	31	35
Forward Volt (max per channel)	18.4V	18.4V
CRI	≥95 CRI	≥95 CRI

#### Above data is for singular fixture

# lucent<sub>®</sub>


Project Ref:		Location Ref:	
Fixture Ord	der Code: A093+LED-TL –		
Fixture - A093+LED-TL	Plus Conical Accent Trimless with LED51		
Finish – WH BK RAL	White Black Custom RAL Colour*		
Location - DP WT XX	Damp Wet Standard Location		
Ceiling Thick <sup>12</sup> <sup>58</sup> <sup>75</sup> C	ness 1/2" 5/8" 3/4" Custom		

## lucent<sub>®</sub>

Project Ref:		Location Ref:
LED Order (	Code:	[
LED — LED51/2 LED51/U LED51SS LED51WD LED51TW	LED50 ONE GEN2 (90 CRI) LED50 ONE ULTRA (98 CRI) LED50 ONE SuperSpot (90 CRI) LED50 ONE Ambiance WarmDim (95 CRI) LED50 ONE Tuneable White (95 CRI)	
CCT — LED51/2 CCT 27 30 35 40	2700K 3000K 3500K 4000K	
LED51/U CCT 27 30 35	2700K 3000K 3500K	
LED51SS CCT 27 30 35 40	2700K 3000K 3500K 4000K	
LED51WD CC 2720 3020	Т 2700К - 2000К 3000К - 2000К	
LED51TW CC <sup>-</sup> 5020	Г 5000к - 2000к	
Beam —		
LED51/2 Beam 12 24 38 60	12° 24° 38° 60°	
LED51/U Bean 12 24 38 60	n 12° 24° 38° 60°	
LED51SS Bean		
LED51WD Bea 28 39	1 <b>m</b> 28° 39°	
LED51TW Bea 25 35	m 25° 35°	

CCT - Please choose CCT depending on LED50 ONE Module required Beam - Please choose Beam Angle depending on LED50 ONE Module required

## lucent

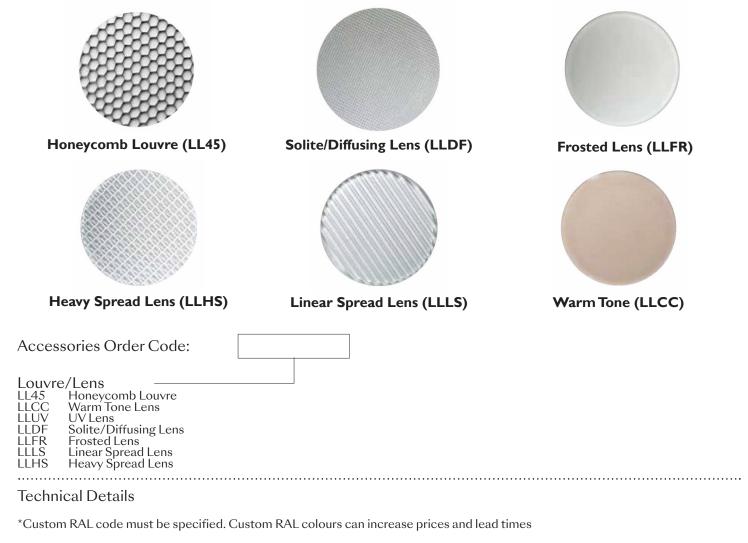

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

Location. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE




Copyright © 2015 Lucent Lighting Inc.

Issued: 12/19

Project Ref:\_

Location Ref:\_

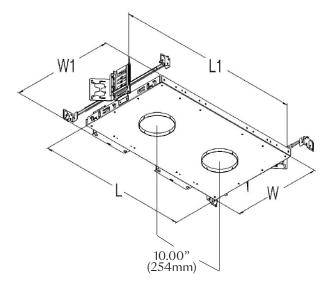

LMT-M2-NIC


 O.C."
 L
 LI
 W
 WI

 10.00"
 20.60"
 25.15"
 12.00"
 14.45"

 (254mm)
 (524mm)
 (639mm)
 (305mm)
 (369mm)

Tray Order Code: LMT-M2-NIC LED51 Housing Type LMT-M2-NIC Lucent Twin Mounting Tray Non-Insulated Ceiling Mounting Hardware 09 9" to 15 14 14" to 2 9" to 15.25" 14" to 24" 28" to 36" 36 ΒB Butterfly Bracket CB Caterpillar Bracket LED LED51 LED51 Range Supply Voltage 120V 277V 120<sup>-</sup> 277 Protocol S P **BELOW PROTOCOL FOR LED51TW** Non-Dimmable TRIAC/Phase (120V ONLY) Lutron Forward Phase 2-Wire (120V ONLY) EcoSystem 5-Series 5% EcoSystem Hi-Lume 1% Fade to Black Lutron 3-Wire Hi-Lume 1% Analog (0 10V) LP ESS Analogue (0-10V) 2-Channel DALI Type 6\*\* DALI Type 8\*\* Lutron (Consult Factory) A2 D6 LHE D8 Analog (0-10V) EldoLED DALI (Not Available for LED51WD) EldoLED Analog (0-10V) (Not Available for LED51WD) ËD EA B Bluetooth Emergency Maintained 3hr Emergency ĒS Maintained 3hr Self Test

## lucent<sub>®</sub>

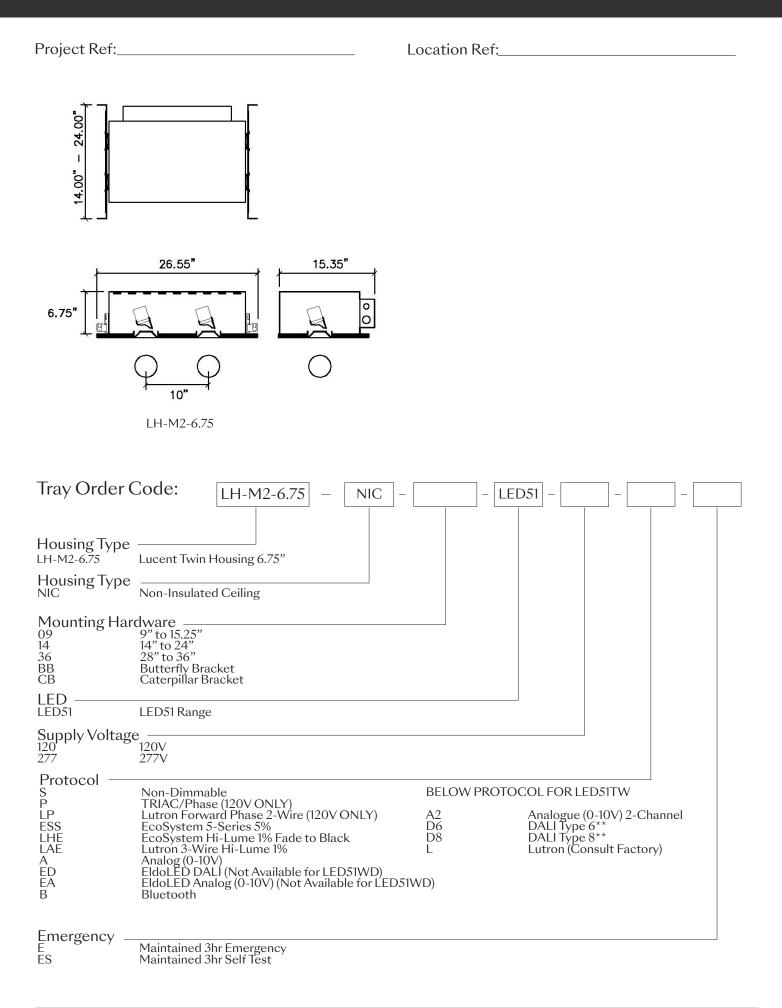

# lucent®

Project Ref:	Location Ref:		
14.00" - 24.00"			
8.5"			
	10" LH-M2-8.50		
Tray Order (	Code: [LH-M2-8.50] - [	– LEI	D51
Housing Type	Lucent Twin Housing 8.50"		
Housing Type NIC IC AT			
Mounting Har 09 14 36 BB CB			
LED	LED51 Range		
Supply Voltage 120 277	e 120V 277V		
Protocol — S P LP ESS LHE LAE A ED EA B	Non-Dimmable TRIAC/Phase (120V ONLY) Lutron Forward Phase 2-Wire (120V ONLY) EcoSystem 5-Series 5% EcoSystem Hi-Lume 1% Fade to Black Lutron 3-Wire Hi-Lume 1% Analog (0-10V) EldoLED DALI (Not Available for LED51WD) EldoLED Analog (0-10V) (Not Available for LED5 Bluetooth	A2 D6 D8	COL FOR LED51TW Analogue (0-10V) 2-Channel DALI Type 6** DALI Type 8** Lutron (Consult Factory)
Emergency E ES	Maintained 3hr Emergency Maintained 3hr Self Test		