


ProSpex 140 Wallwash



140mm (5.51”) overall diameter. Available with standard trim kit. Family of matching products also available.
Required depth height + 25mm^

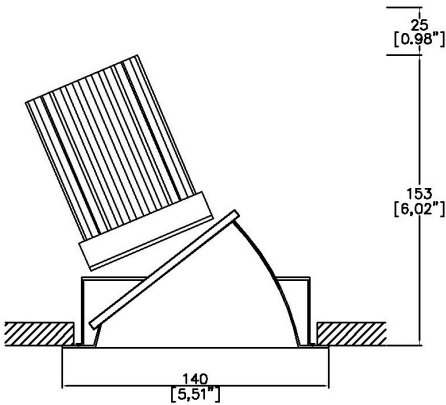

140-LED-WW

LED Source	LED71TW
CCT range	5000K-2000K @ 3000K
Drive Current (max per channel)	1000mA
Power inc Driver Max	27.5W
Beam Angle	42°
Delivered Lumens	862
Delivered Intensisty cd	716.4
Efficacy lm/w	31
Forward Volt (max per channel)	23.4V
CRI	≥95 CRI


Project Ref: _____ Location Ref: _____

Fixture Order Code: - - - -

Fixture	140-LED-WW	Reflector140 Wallwash with LED71
Reflector Finish		
PS		Polished Silver
SS		Satin Silver
CG		Champagne Gold
BK		Black
WH		White
Trim Finish		
WH		White
BK		Black
RAL		Custom RAL Colour*
IP Rating	44	IP44
Emergency		
E		Maintained 3hr Emergency
ED		Maintained 3hr DALI Self Test
ES		Maintained 3hr Self Test

LED Order Code: - - -

LED	LED71TW	LED70 ONE Tuneable White
CCT	5020	5000K - 2000K
Beam	42	42°
Protocol		
D6		DALI Type 6**
D8		DALI Type 8**
B		Bluetooth***



Honeycomb Louvre



Warm Tone

Accessories Order Code:

Louvre/Lens

MD45 Honeycomb Louvre
MDCC Warm Tone Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**DALI Type 6 requires two DALI addresses, one for CCT control the other for Intesisty control. DALI Type 8 is a single DALI Type 8 address for CCT and Intesisty control. Please check which control system is being used before specifying.

***Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

Light efficiency:

31 Lumen/Watt


Light quality:

CRI: 91.0

Color temperature:

3133 K

76.8°



Product name:

**140-LED-WW-PS -
LED71TW-5020-42 3000K**


Item number:

**ProSpex140 WallwashPS
reflector - LED71TW-5020-42 @
3000K**


**Delivered information for above
fixture and LED combination.**

Output: 862 Lumen Peak intensity: 716 cd Power consumption: 27.5


CRI R values

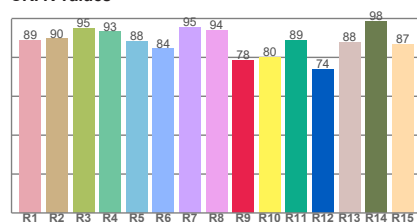

TM30 C Values

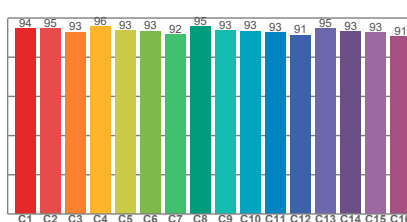


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3133 K	91.0	78.5	93.6	105.8	94.1	0.410	0.361	0.252	0.333	-0.0143

Beam details

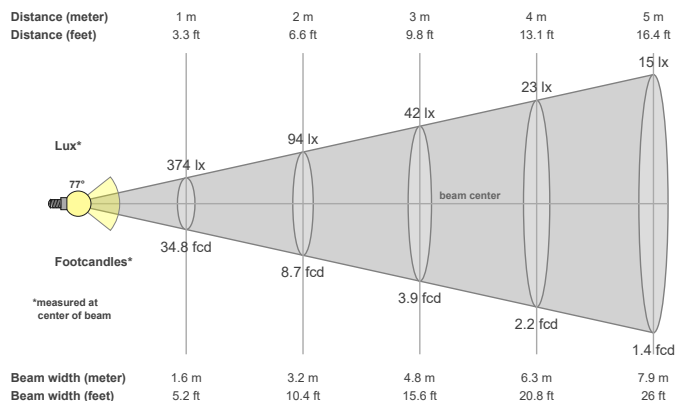

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
76.8°	102.7°	114.1°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
716 cd	98.5%	85.1%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
374lx	94lx	42lx	23lx	15lx	10lx	8lx	6lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx
34.8fcd	8.7fcd	3.9fcd	2.2fcd	1.4fcd	1fcd	0.7fcd	0.5fcd	0.4fcd	0.3fcd	0.3fcd	0.2fcd	0.2fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd

All the above information for fixtures with LED71TW-5020 modules are tested at 3000K

Factors to adjust lumen output for the following CCTs at 100% output for the colour are as follows:

2000K = 0.75

2700K = 0.93

3500K = 1.07

4000K = 1.11

5000K = 1.17