


Surface Midi Shallow Height



75mm (2.95”) overall diameter. Miniature surface mounted tubular downlight. Remote installation driver. Family of matching products also available.

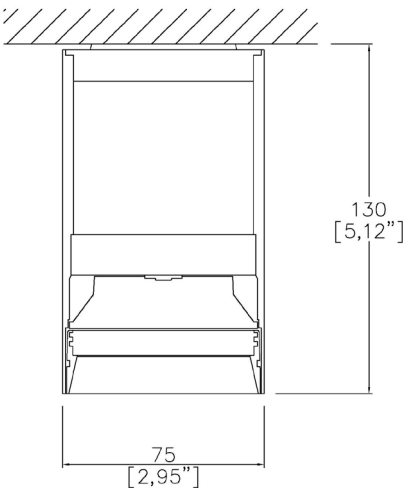

075-SM-SH

LED Source	LED	LED	LED
CCT	3000K	3000K	3000K
Drive Current	525mA	525mA	525mA
Power inc Driver	22W	22W	22W
Beam Angle	12°	19°	34°
Delivered Lumens	1340	1185	1226
Delivered Intensisty cd	20036	9215	3923
Efficacy lm/w	61	54	56
Forward Volt	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI

Project Ref: _____

Location Ref: _____

Fixture Order Code:

075-SM-SH

 - - - - -

Fixture

075-SM-SH

Surface Midi Shallow Height

Finish

WH

BK

RAL

White

Black

Custom RAL Colour*

CCT

27

30

40

2700K

3000K

4000K

Beam

12

19

34

12°

19°

34°

Protocol

S

A

P

D

B

Non-Dim

Analogue (0-10v)

Phase

DALI

Bluetooth**

Emergency

E

ED

ES

Maintained 3hr Emergency

Maintained 3hr DALI Self Test

Maintained 3hr Self Test