


Soft70 Gen2 Accent Trim

TM65.2 11kgCO2e

TM66 2.5 CEAM



Ø90mm (3.54") overall trim. Ø70mm (2.76") overall trimless. 30° Tilt in all directions. Available with standard trim kit or 3 flush trim options, depending on ceiling type and finish. Family of matching products also available.

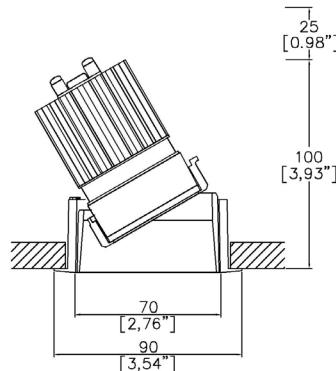

SF70210-TR1⁽¹⁾
Cut-out Ø82mm (Ø3.22").
Required depth height + 25mm[^]

LED Source	LED51/3-TW	LED51/3-TW	LED51/3-TW
CRI	≥90 CRI	≥90 CRI	≥90 CRI
Drive Current	350mA	350mA	350mA
Power inc Driver	15.4W	15.4W	15.4W
Beam Angle	NF (20°)	FL (37°/33°)	WFL (57°/52°)
Forward Volt	36V	36V	36V
CCT	6527 4018	6527 4018	6527 4018
Delivered Lumens	1282 1083	1254 1099	1107 967
Delivered Intensity cd	6963 5931	3026 2966	1177 1175
Delivered Lumens per circuit watt	83 70	81 71	71 62

Note: Performance data is based on the Highest CCT of each module type. Refer to the table on the last page for the factors.

Project Ref: _____

Location Ref: _____

Fixture Order Code:	SF70210	-	TR1	-	_____	-	_____	-	_____	-	_____
Fixture											
SF70210	Soft70 Gen2 Accent for LED										
Installation											
TR1	Trim for Existing Ceilings (ceiling thickness 25mm max)										
Body Finish											
WH03	White RAL 9016										
BK01	Black RAL 9005										
RAL*	Custom RAL Colour*										
ABR1	Antique Brass										
ABZ1	Antique Bronze										
PCH1	Polished Chrome										
PNK1	Polished Nickel										
PBR1	Polished Brass										
Trim Finish											
WH03	White RAL 9016										
BK01	Black RAL 9005										
RAL*	Custom RAL Colour*										
ABR1	Antique Brass										
ABZ1	Antique Bronze										
PCH1	Polished Chrome										
PNK1	Polished Nickel										
PBR1	Polished Brass										
IP Rating											
20	IP20										
65	IP65										
Fire Rating											
0	No Fire Rating										
FR (3)	Fire Rated										

(1) For any ceiling thickness or construction type not shown please contact Lucent

(2) Adjustment may be limited in thicker ceiling constructions. Refer to installation instructions for details.


(3) Tested and approved to EN 1363-1:2020 and EN 1365-2:2014 for 60 minutes Fire Rating.

Module Order Code:	LED51/3-TW	-	_____	-	_____
LED					
LED51/3-TW	LED50 ONE Gen3 Dynamic Tuneable White				
CCT					
4018	4000K - 1800K				
6527	6500K - 2700K				
Beam					
NF	Narrow Flood				
FL	Flood				
WFL	Wide Flood				

Driver Options:	_____	
Protocol		
D6	DALI Type 6**	
D8	DALI Type 8**	
B	Bluetooth***	

Emergency Options:	_____	
Emergency		
E	Maintained 3hr Emergency	
ED	Maintained 3hr DALI Self Test	
ES	Maintained 3hr Self Test	

Installation Kits



Trim Kit for Existing Ceilings

Finish selection



Antique Brass



Antique Bronze



Polished Brass




Polished Nickel



Polished Chrome

Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens

LL45	Honeycomb Louvre
LLDF	Diffusing Lens
LLFR	Frosted Lens
LLLS	Linear Spread Lens
LLHS	Heavy Spread Lens

LED35/3-TW Factor Table

	6500K-2700K		4000K-1800K	
CCT	Lm Factor	System Wattage	Lm Factor	System Wattage
6500K	1.00	9.2		
5000K	1.12	9.2		
4000K	1.23	10.6	1.00	9.2
3000K	0.95	9.4	1.00	9.7
2700K	0.82	8.4	1.00	10.9
2400K			0.88	11
2200K			0.75	10.2
1800K			0.53	8.6

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE