


EasyFit Trim Round Wallwash



3.78" (96mm) overall diameter. Range of soft appearance with minimal trim for achieving trimless effect. Fixed and adjustable version available. Supplied with a remote driver box and a plug and play tethered power supply.

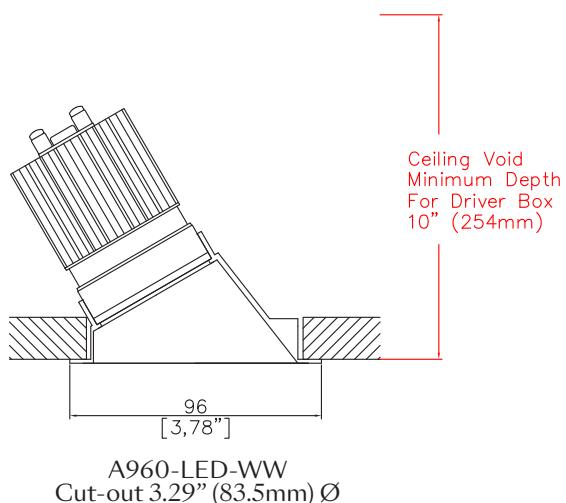

LED Source	ALED51/3
CCT	3000K
Drive Current	350mA
Power inc Driver	14.8W
Beam Angle	WW
Delivered Lumens	748
Delivered Intensity cd	651
Delivered Lumens per circuit watt	51
Forward Volt	36V
CRI	≥90 CRI

Apply these factors to 3000K for lumen output of other CCTs: 2200K x 0.85 / 2400K x 0.89 / 2700K x 0.97 / 3500K x 1.01 / 4000K x 1.10.

Ceiling void minimum depth for driver box: 10.00" (254mm)

Project Ref: _____

Location Ref: _____

Specify fixture part number (All boxes must be filled in to correctly order)

A960-LED-WW **ALED51/3****WFL****ALEZ1-120-277**

Finish _____

WH White
BK Black
RAL Custom*
ABR1 Antique Brass
ABZ1 Antique Bronze
PCH1 Polished Chrome
PNK1 Polished Nickel
PBR1 Polished Brass

Location _____

DP Damp
WT Wet

Supplied for dry location as standard

LED Type _____

ALED51/3 LED50 ONE GEN3

CCT _____

22 2200K (l)
24 2400K (l)
27 2700K
30 3000K
35 3500K (l)
40 4000K (l)

(l) contact Lucent for availability

Beam Angles _____

WFL Wide Flood

EasyFit _____

ALEZ1-120-277

Lucent EasyFit 120-277V

Dimming Protocol _____

SLA EldoLED Analog (0-10V) (0.1% Dimming)
ECA EldoLED Analog (0-10V) (1% Dimming)
SLD EldoLED DALI (0.1% Dimming)
ECD EldoLED DALI (1% Dimming)
PTB15 ERP PTB 0-10V/Phase (1% Dimming) (PHASE ONLY 120V)
FTX15 Hatch Foundation 0-10V/Phase (1% Dimming)

Contact Lucent factory for Lutron LED Driver options


Louvre/Lens _____

XX Not required
LL45 Honeycomb

Trim accepts a maximum of 1 accessory


**NIC - No contact with insulation****Ceiling void minimum depth for driver box: 10.00" (254mm)**

Fixture and EasyFit driver box

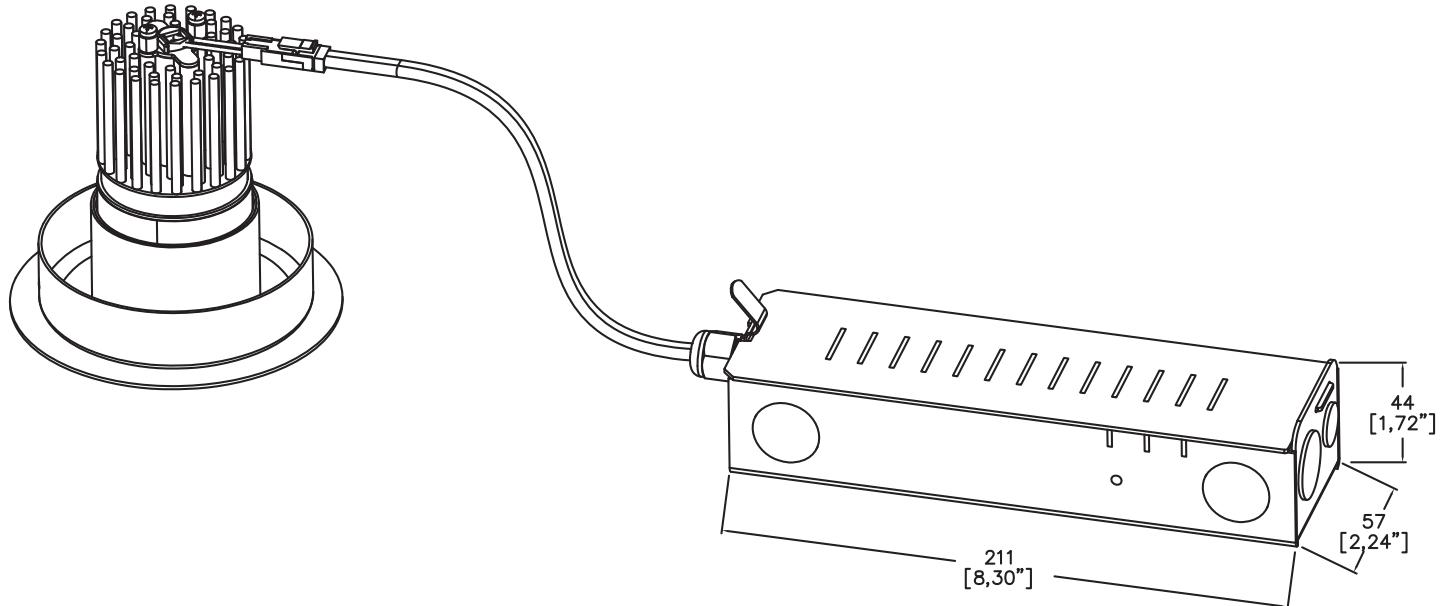

Ceiling void minimum depth for driver box: 10.00" (254mm)

Finish selection



Antique Brass



Antique Bronze



Polished Brass




Polished Nickel



Polished Chrome

Accessories



Honeycomb Louvre

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

^ Depth indicated is the minimum recess depth for the driver to be installed through the luminaire cut out.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

Location. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

