QUANTUM Module

Oculus50 Accent Trim

TM65.2	4kgCO2e
TM66	2.5 CEAM

Ø68mm (2.68") adjustable downlight with eyeball mechanism, offering 30° adjustment in all directions. Available with a standard trim kit or 3 flush trim options, depending on ceiling type and finish.

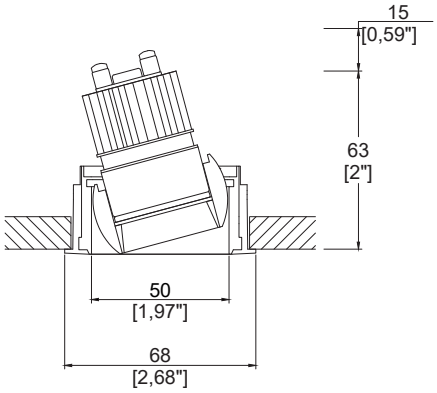

Oculus50 with Trim Kit TR1
Cut-out Ø64mm (Ø2,51").
Required depth height +15mm.

LED Source	LED35/Q-HE-SF	LED35/Q-HE-SF	LED35/Q-HE-SF	LED35/Q-HE-SF
CCT	3000K	3000K	3000K	3000K
Drive Current	150mA	150mA	150mA	150mA
Power inc Driver	5.5W	5.5W	5.5W	5.5W
Beam Angle	NF (17°)	MF (22°)	FL (33°)	WFL (38°)
Delivered Lumens	631	638	649	577
Delivered Intensisty cd	4749	3741	2014	848
Delivered Lumens per circuit watt	114	116	118	104
Forward Volt	31V	31V	31V	31V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI

L1 ≥75 Dwellings Compliant

L2 ≥95 General Compliant

L2 ≥80 Display Compliant

Apply these factors to 3000K for lumen output of other CCTs: **2700K** x 0.98 / **4000K** x 1.02.

Copyright © 2026 Lucent Lighting Ltd.

Project Ref:_____ Location Ref:_____

Fixture Order Code: OC50010 – [ ] – [ ] – [ ] – [ ] – 65 – FR

Fixture
OC50010 Oculus50 Accent for LED

Installation
TR1 (1) Trim for Existing Ceilings (ceiling thickness 5-25mm)

Oculus Finish
WH02 Textured Matt White RAL 9010
BK02 Textured Matt Black RAL 9005
RAL* Custom RAL Colour*
ABR1 Antique Brass
ABZ1 Antique Bronze
PCH1 Polished Chrome
PNK1 Polished Nickel
PBR1 Polished Brass

Internal Finish
WH02 Textured Matt White RAL 9010
BK02 Textured Matt Black RAL 9005
RAL* Custom RAL Colour*
ABR1 Antique Brass
ABZ1 Antique Bronze

Trim Finish
WH02 Textured Matt White RAL 9010
BK02 Textured Matt Black RAL 9005
RAL* Custom RAL Colour*
ABR1 Antique Brass
ABZ1 Antique Bronze
PCH1 Polished Chrome
PNK1 Polished Nickel
PBR1 Polished Brass

IP Rating
65 IP65

Fire Rating
FR (2) Fire Rated

(1) For any ceiling thickness or construction type not shown please contact Lucent

(2) Tested and approved to EN 1363-1:2020 and EN 1365-2:2014 for 60 minutes Fire Rating.

Module Order Code: LED35/Q-HE – [ ] – [ ] – SF

LED
LED35/Q-HE LED35 QUANTUM High Efficacy

CCT
27 2700K
30 3000K
40 4000K (3)

Beam
NF Narrow Flood
MF Medium Flood
FL Flood
WFL Wide Flood

Output Type
SF Shallow Height, Full Output

(3) contact Lucent for availability

Driver Options: [ ]

Protocol
S Non-Dim
A Analogue (0-10v)
P Phase
D DALI
B Bluetooth**

Emergency Options: [ ]

Emergency
E Maintained 3hr Emergency
ED Maintained 3hr DALI Self Test
ES Maintained 3hr Self Test

Copyright © 2026 Lucent Lighting Ltd.

Finish selection

Antique Brass

Antique Bronze

Polished Brass



Polished Nickel

Polished Chrome

Accessories

Honeycomb Louvre



Diffusing Lens

Frosted Lens



Heavy Spread Lens

Linear Spread Lens

Accessories Order Code:

Louvre/Lens

LS45	Honeycomb Louvre
LSDF	Diffusing Lens
LSFR	Frosted Lens
LSLS	Linear Spread Lens
LSHS	Heavy Spread Lens

Copyright © 2026 Lucent Lighting Ltd.

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE