

Plus3.5 Round Wallwash



Plus provides high performance electronics and architectural aesthetics in round and square 3.5” and 5” trim. Plus products include adjustable, fixed and wallwash in a flanged or trimless installation kit. Adjustable can be provided with gear driven adjustment or manual adjustment. Available in various front plates (Conical, Bevel, Edge, Pyramidal and Square Bevel) Bevel and Square Bevel available with various color inserts. Tray, retrofit and housing installation methods (NIC, IC, AT, T24 and CCEA). Lucent modules available in a wide range of color temperatures, beam angles, intensities, and effects (Ambiance WarmDim and Dynamic Tuneable White). MR16 and GU10 LED lamp options available.

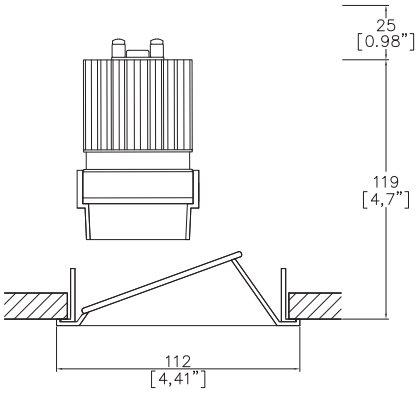

A090+LED-TR-WW
0° - 30° vertical adjustment
Cut-out 102mm (4.02”) Ø

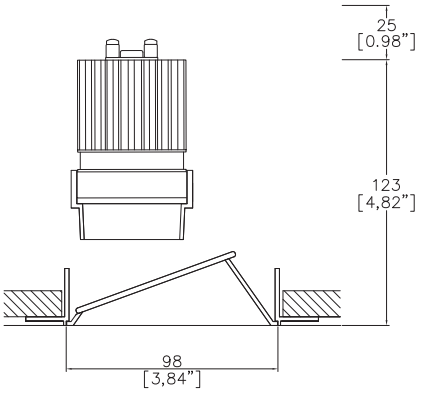

A090+LED-TL-WW
0° - 30° vertical adjustment
Cut-out 102mm (4.02”) Ø



Installation kit for overlap flange



Mud-in kit for seamless/trimless

LED Source	ALED51/3
CCT	3000K
Drive Current	350mA
Power inc Driver	14.8W
Beam Angle	WFL
Delivered Lumens	764
Delivered Intensisty cd	797
Efficacy lm/w	52
Forward Volt	36V
CRI	≥90 CRI

Copyright © 2015 Lucent Lighting Inc.

Project Ref: _____ Location Ref: _____

Specify fixture part number (All boxes must be filled in to correctly order)

A090+LED					ALED51/3		WFL					

Installation
TR-WW Flange kit
TL-WW Mud-in kit

Finish
WH White
BK Black
RAL Custom*

Location
XX Dry
DP Damp
WT Wet

Ceiling Thickness
SC Standard Ceiling (1/2"-5/8"-3/4")
C Custom

LED Type
ALED51/3 LED50 ONE GEN3

CCT
27 2700K
30 3000K
35 3500K (1)
40 4000K (1)

Beam Angles
WFL Wide Flood

(1) contact Lucent for availability

Housing/Tray
ALMT-13-NIC Mounting Tray Non-Insulated ceilings
ALH-8.50-AT/IC Housing 8.50" Insulated/Air-tight ceilings and Chicago Plenum

Mounting Hardware
1287 16" to 24" - Adjustable Bar Hanger Lengths
1487 Up to 48" - Adjustable Bar Hanger Lengths (mounts on butterfly bracket)

Supply Voltage
120 120V
277 277V


Dimming Protocol
S Non-Dimmable
P TRIAC/Phase (120V ONLY) (25-10% Minimum Dimming)***
A 0-10V (15-5% Minimum Dimming)***
ESD EldoLED Solo DALI2 (0.1% Dimming)
EED EldoLED Eco DALI2 (1% Dimming)
ESA EldoLED Solo 0-10V/1-10V (0.1% Dimming)
EEA EldoLED Eco 0-10V/1-10V (1% Dimming)
B Bluetooth**

Emergency
E 1.5hr Emergency
ES 1.5hr Self Test

*Refer to Technical Details for more information


Copyright © 2015 Lucent Lighting Inc.

Housing dimensions

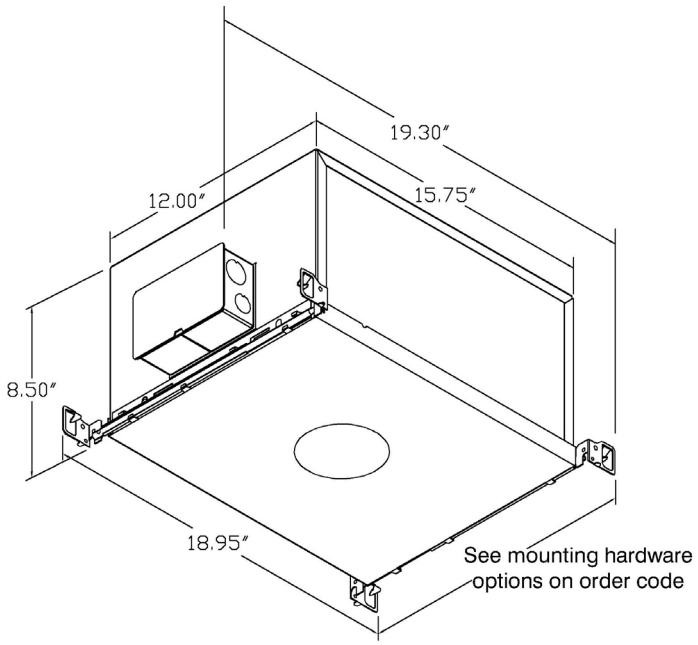

ALH-8.50
Insulated/air-tight ceilings and
Chicago Plenum

Tray dimensions

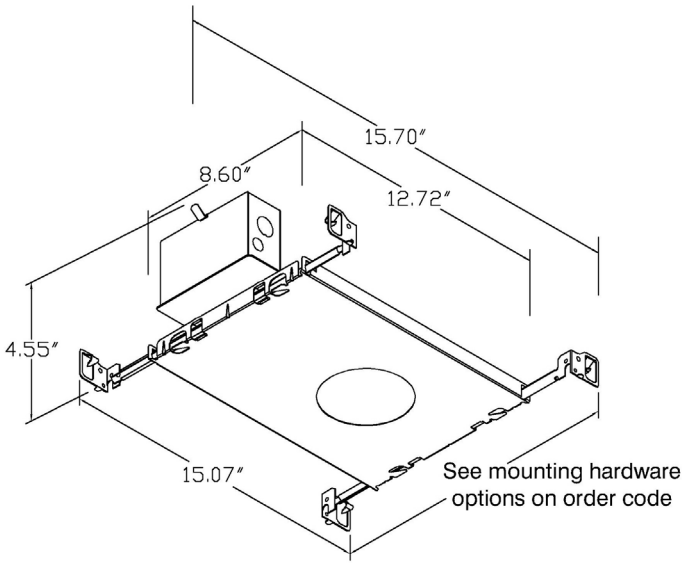

ALMT-13
Non-insulated ceilings

Copyright © 2015 Lucent Lighting Inc.

Technical Details

*Custom color requires a paint chip or RAL code and may increase price and lead-time

It is the responsibility of the specifier/integrator/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is a communication protocol. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or Bluetooth devices.

***Non specific driver type, dimming performance depending on exact driver used. Contact Lucent Lighting for more information.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant installation instructions prior to purchase.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

Location. Tested from underside of the ceiling.

Data correct at time of publishing. It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting, Incorporated. Lucent Lighting reserves the right to take whatever action is necessary to protect its intellectual property, patents and trademarks

Please notify Lucent Lighting Inc. inaccuracies. E&OE