

Light efficiency:

66 Lumen/Watt


Light quality:

CRI: 91.9

Color temperature:

3000 K

Output: 444 Lumen Peak intensity: 17572 cd Power consumption: 6.7

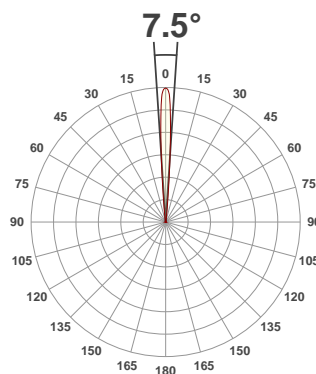

Product name:


**Plus Mini Conical Fixed -
LED51 SuperSpot, 3000K, 7°,
500mA**

Item number:


750+LED51SS-30-7-500mA

**Delivered information for
above fixture and LED
combination.**


CRI R values

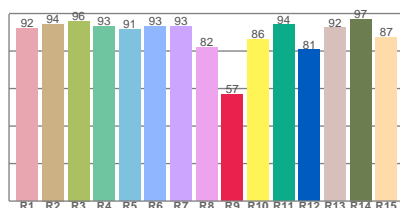

TM30 C Values

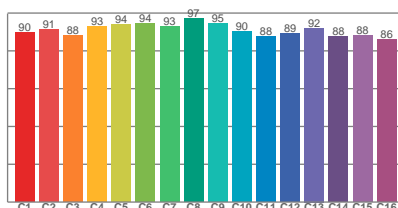


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	91.9	56.9	91.0	99.7	90.7	0.437	0.404	0.249	0.349	0.0014

Beam details

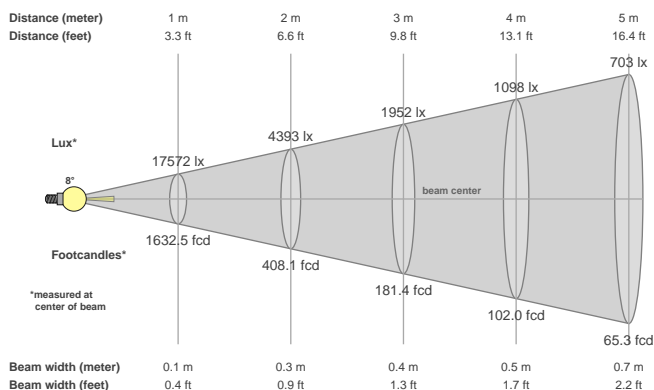

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
7.5°	12.7°	20.2°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
17572 cd	97.5%	96.6%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
17572lx	4393lx	1952lx	1098lx	703lx	488lx	359lx	275lx	217lx	176lx	145lx	122lx	104lx	90lx	78lx	69lx	61lx	54lx	49lx	44lx
1632.5fcd	408.1fcd	181.4fcd	102fcd	65.3fcd	45.3fcd	33.3fcd	25.5fcd	20.2fcd	16.3fcd	13.5fcd	11.3fcd	9.7fcd	8.3fcd	7.3fcd	6.4fcd	5.6fcd	5fcd	4.5fcd	4.1fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.9

4000K = 1.08