



TubeLED Nano Monopoints




TubeLED consists of the Nano, Micro, Mini and Midi versions giving a wide range of fixing options, light outputs and beam angles. TubeLED Mini available as SuperSpot version with ultra narrow beam option. TubeLED Mini and Midi available as high output versions. Can be installed in Mains Volt and Low Volt track or surface mounted options.

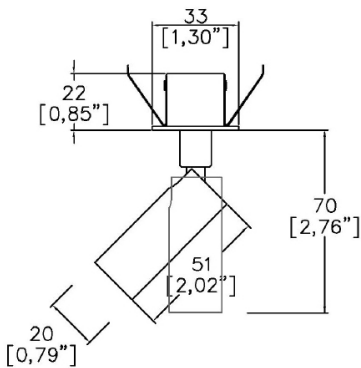

A1100-LED-RMP
Cut-out 0.98" (25mm) Ø

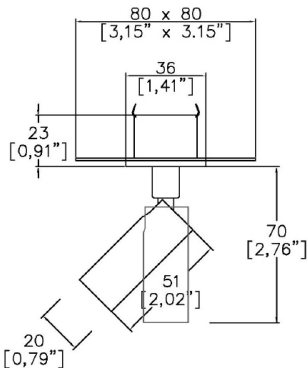

A1100-LED-TMP
Cut-out 0.98" (25mm) Ø

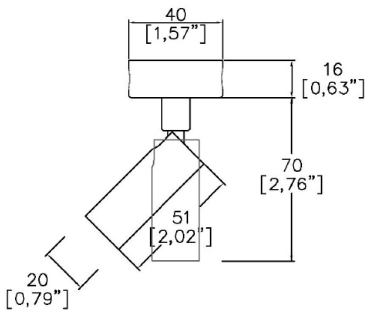

A1100-LED-SMP
Cut-out 0.47" (12mm) Ø

LED Source	LED	LED	LED
CCT	3000K	3000K	3000K
Drive Current	700mA	700mA	700mA
Power inc Driver	2.6W	2.6W	2.6W
Beam Angle	15°	25°	30°
Delivered Lumens	150	165	146
Delivered Intensisty cd	1368	783	505
Efficacy lm/w	58	65	57
Forward Volt	3V	3V	3V
CRI	≥90 CRI	≥90 CRI	≥90 CRI

Project Ref: _____ Location Ref: _____

Specify fixture part number (All boxes must be filled in to correctly order)

A1100-LED				
-----------	--	--	--	--

CCT

272700K

303000K

Beam Angles

1515

2525

3030

Finish

WHWhite

BKBlack

RALCustom RAL Finish*

Fixing

RMPRecessed Monopoint

TMPTrimless Monopoint


SMPSurface Monopoint

To be used with remove driver.

^Not all power supplies are available for single connection, some require series connection with multiple fittings.
Consult Lucent Lighting Inc for more information.

PSU_ENCLOSURE_UL

Enclosure Details

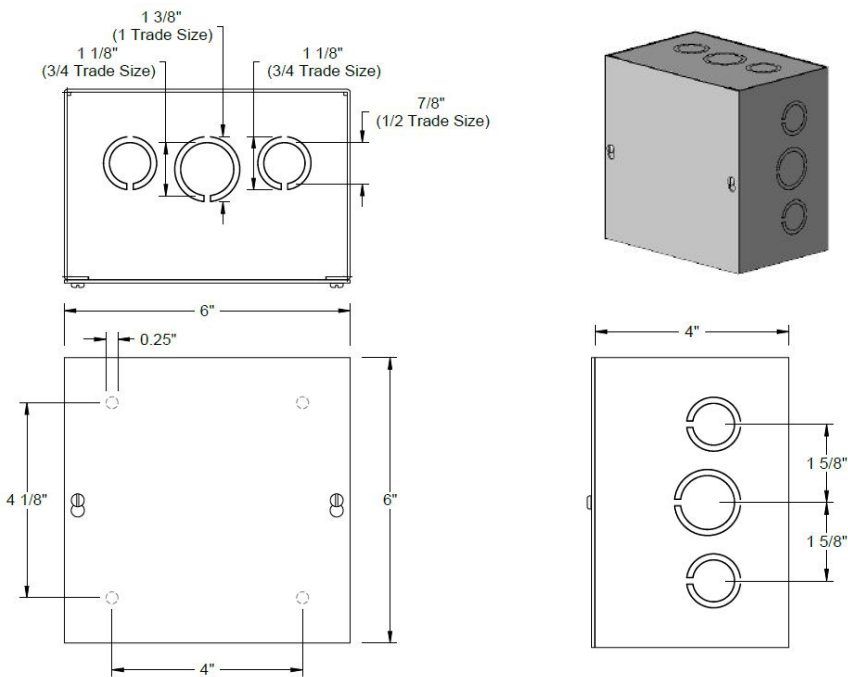

Factory mounted power supplies in enclosure. Maximum distance 100ft, 16AWG wire. Complies with UL2108.

Above enclosure is for the installation of one remote driver, for multiple drivers, the enclosure size will increase.

Please select your driver option from below.

PSU_ENCLOSURE_UL

Dimming Protocol^

- S** Non-Dimmable
- P** TRIAC/Phase (120V ONLY) (25-10% Minimum Dimming)***
- A** 0-10V (15-5% Minimum Dimming)***
- ESD** EldoLED Solo DALI2 (0.1% Dimming)
- EED** EldoLED Eco DALI2 (1% Dimming)
- ESA** EldoLED Solo 0-10V/1-10V (0.1% Dimming)
- EEA** EldoLED Eco 0-10V/1-10V (1% Dimming)
- B** Bluetooth**

Technical Details

*Custom color requires a paint chip or RAL code and may increase price and lead-time

It is the responsibility of the specifier/integrator/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is a communication protocol. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or Bluetooth devices.

***Non specific driver type, dimming performance depending on exact driver used. Contact Lucent Lighting for more information.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant installation instructions prior to purchase.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

Location. Tested from underside of the ceiling.

Data correct at time of publishing. It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting, Incorporated. Lucent Lighting reserves the right to take whatever action is necessary to protect its intellectual property, patents and trademarks

Please notify Lucent Lighting Inc. in accuracies. E&OE



Light efficiency:


58 Lumen/Watt

Light quality:

CRI: 92.2

Color temperature:

3000 K



Product name:

TubeLED Nano, 3000K, 15°, 700mA


Item number:

1100-LED-930-15-700mA


Delivered information for
above fixture and LED
combination.

Output: 150 Lumen Peak intensity: 1368 cd Power consumption: 2.6


CRI values

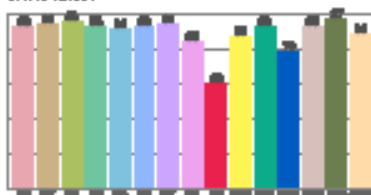

TM30-08 values

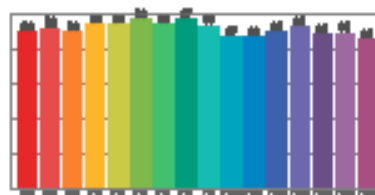


Color vector graphics



Color-renderer	Chromaticity	Red-renderer	Color-shift	Green-shift	Blue-shift	Color-renderer	Color-renderer	Color-renderer	Color-renderer	Color-renderer
CCT	CRI	CRI R9	TM30 R9	TM30 Rg	CRI	x	y	u	v	z
3000 K	92.2	85.8	91.8	88.8	91.2	0.437	0.404	0.246	0.247	0.003

Beam data

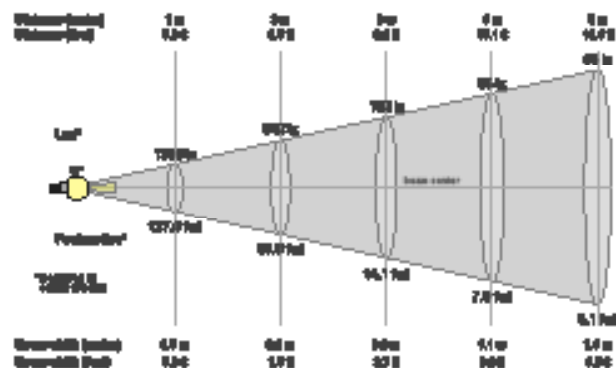

Beam spread

Beam angle 50%	Field angle 50%	Cut-off angle 2.5%
15.7°	30.2°	49°

Beam intensity

Peak intensity	Int. ratio to 120° beam	Int. ratio to 60° beam
1368 cd	88.8%	88.2%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1368lx	342lx	152lx	85lx	55lx	39lx	28lx	21lx	17lx	14lx	11lx	9lx	8lx	7lx	6lx	5lx	5lx	4lx	4lx	3lx
127fc	31.8fc	14.1fc	7.9fc	5.1fc	3.5fc	2.6fc	2fc	1.6fc	1.3fc	1fc	0.9fc	0.8fc	0.6fc	0.6fc	0.5fc	0.4fc	0.4fc	0.4fc	0.3fc

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.82

4000K = 1.11

Light efficiency:


65 Lumen/Watt

Light quality:

CRI: 92.2

Color temperature:

3000 K

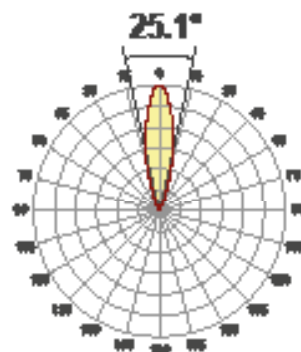

Product name:

TubeLED Nano, 3000K, 25°, 700mA


Part number:

1100-LED-930-25-700mA


Delivered information for above fixture and LED combination.

Output: 165 Lumen Peak intensity: 783 cd Power consumption: 2.6


CRI values

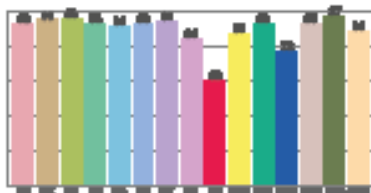

TM1903 C Values

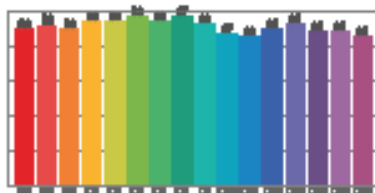


Color vector graphics



Colorimetric	Colorimetric	Reference	Colorimetric	Colorimetric	Colorimetric	Colorimetric	Colorimetric	Colorimetric	Colorimetric	Colorimetric
CCT	CRI	CRI Ra	TM1903	TM1903	CRI	X	Y	u	v	Z
3000 K	92.2	91.1	90.8	91.1	91.1	0.437	0.404	0.244	0.247	0.0710

Beam data

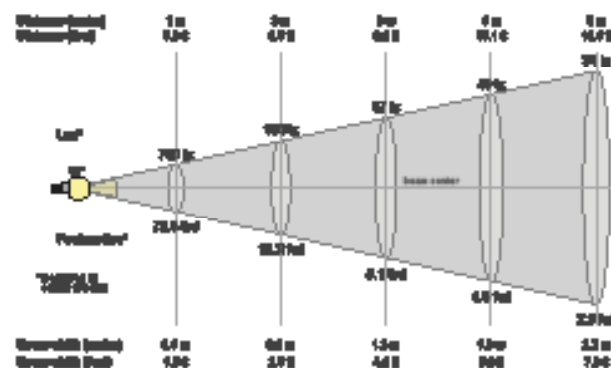

Beam angle

Beam angle 50%	Field angle 90%	Cutoff angle 2.5%
25.1°	46.4°	64.3°

Beam intensities

Peak intensity	Int. ratio to 120° beam	Int. ratio to 90° beam
783 cd	91.3%	91.3%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
783lx	196lx	87lx	49lx	31lx	22lx	16lx	12lx	10lx	8lx	6lx	5lx	5lx	4lx	3lx	3lx	3lx	2lx	2lx	2lx
72.8fcd	18.2fcd	8.1fcd	4.5fcd	2.9fcd	2fcd	1.5fcd	1.1fcd	0.9fcd	0.7fcd	0.6fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd	0.3fcd	0.3fcd	0.2fcd	0.2fcd	0.2fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.82

4000K = 1.11

Light efficiency:


57 Lumen/Watt

Light quality:

CRI: 92.2

Color temperature:

3000 K

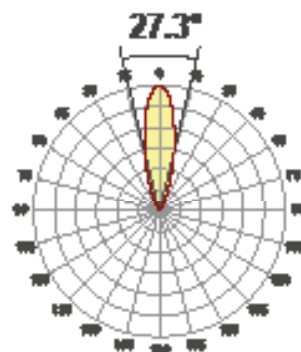

Product name:

TubeLED Nano, 3000K, 30°, 700mA


Part number:

1100-LED-930-30-700mA


Delivered information for above fixture and LED combination.

Output: 146 Lumen Peak intensity: 505 cd Power consumption: 2.6


CRI values

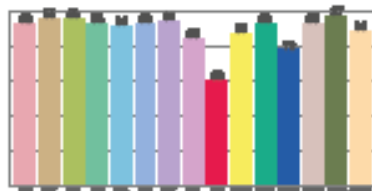

TM1903 Values

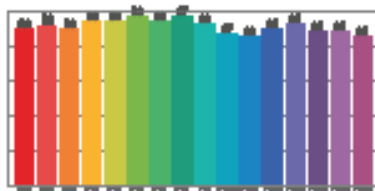


Color vector graphics



Colorimetric	Colorimetric	Reference	Colorimetric	Colorimetric	Colorimetric	Colorimetric	Colorimetric	Colorimetric	Colorimetric	Colorimetric
CCT	CRI	CRI R9	TM1903	TM1903	CRI	X	Y	u	v	Z
3000 K	92.2	91.1	0.01	0.01	0.11	0.437	0.404	0.245	0.247	0.0014

Beam data

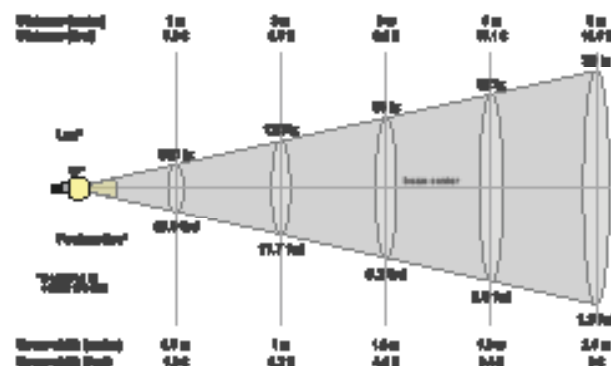

Beam angle

Beam angle 50%	Field angle 90%	Cutoff angle 2.4%
27.3°	64.8°	12.2°

Beam intensities

Peak intensity	Int. ratio to 120° beam	Int. ratio to 90° beam
405 cd	0.1%	0.1%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
505lx	126lx	56lx	32lx	20lx	14lx	10lx	8lx	6lx	5lx	4lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx
46.9fcd	11.7fcd	5.2fcd	2.9fcd	1.9fcd	1.3fcd	1fcd	0.7fcd	0.6fcd	0.5fcd	0.4fcd	0.3fcd	0.3fcd	0.2fcd	0.2fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.82

4000K = 1.11