

# ProSpex Edge90 Accent


| | |
|---|---|
| TM65.2 | 11kgCO2e |
| TM66 | 2.3 CEAM |

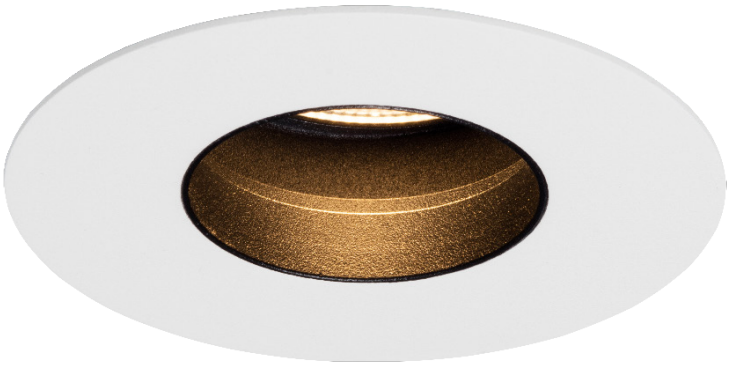

92mm (3.62”) overall diameter. 360° rotation. Up to 30° tilt. Edge baffle to ensure aperture is glare free and for a professional look. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available.

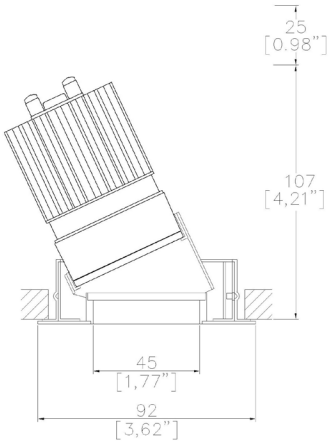


91413-A-LED + 9000-PBZ
Cut-out Ø83mm
Required depth height + 25mm^

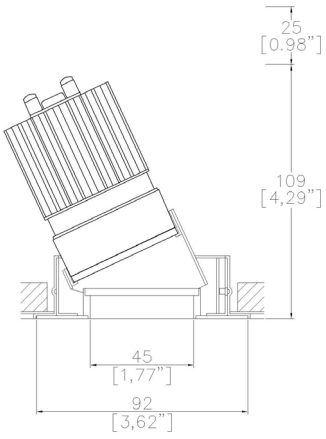


91413-A-LED + 9000-PCZ
Cut-out Ø 83mm
Required depth height + 25mm^

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| LED Source | LED51/3-TW | | LED51/3-TW | | LED51/3-TW | |
| CRI | ≥90 CRI | | ≥90 CRI | | ≥90 CRI | |
| Drive Current | 350mA | | 350mA | | 350mA | |
| Power inc Driver | 15.4W | | 15.4W | | 15.4W | |
| Beam Angle | NF (20°) | | FL (35°/31°) | | WFL (52°/54°) | |
| Forward Volt | 36V | | 36V | | 36V | |
| CCT | 6527 | 4018 | 6527 | 4018 | 6527 | 4018 |
| Delivered Lumens | 1119 | 935 | 1080 | 944 | 888 | 800 |
| Delivered Intensisty cd | 6474 | 5878 | 2998 | 3018 | 1174 | 1156 |
| Delivered Lumens per circuit watt | 72 | 60 | 70 | 61 | 57 | 51 |

**Note: Performance data is based on the Highest CCT of each module type. Refer to the table on the last page for the factors.**

Copyright © 2026 Lucent Lighting Ltd.

Project Ref:_____ Location Ref:_____

## Fixture Order Code: 91413-A-LED – [ ] – [ ]

**Fixture**

| | |
|---|---|
| 91413-A-LED | Edge90 Accent with LED51 |

**Finish**

| | |
|---|---|
| WH | White RAL 9010 |
| BK | Black RAL 9005 |
| RAL* | Custom RAL Colour* |
| ABR1 | Antique Brass |
| ABZ1 | Antique Bronze |
| PCH1 | Polished Chrome |
| PNK1 | Polished Nickel |
| PBR1 | Polished Brass |

**IP Rating**

| | |
|---|---|
| 44 | IP44 |
| 54 | IP54 |

*IP Rating: If you do not require an IP rating please leave the box blank*

## Installation Order Code: [ ]

**Installation**

| | |
|---|---|
| 9000-PBZ | Trim kit for trimmed appearance |
| 9000-PCZ | Plaster-kit for seamless flush appearance |



## Module Order Code: LED51/3-TW – [ ] – [ ]

**LED**

| | |
|---|---|
| LED51/3-TW | LED50 ONE Gen3 Dynamic Tuneable White |

**CCT**

| | |
|---|---|
| 6527 | 6500K - 2700K |
| 4018 | 4000K - 1800K |

**Beam**

| | |
|---|---|
| NF | Narrow Flood |
| FL | Flood |
| WFL | Wide Flood |

## Driver Options: [ ]

**Protocol**

| | |
|---|---|
| D6 | DALI Type 6** |
| D8 | DALI Type 8** |
| B | Bluetooth*** |

## Emergency Options: [ ]

**Emergency**

| | |
|---|---|
| E | Maintained 3hr Emergency |
| ED | Maintained 3hr DALI Self Test |
| ES | Maintained 3hr Self Test |

Copyright © 2026 Lucent Lighting Ltd.

## Finish selection




Antique Brass



Antique Bronze



Polished Brass



Polished Nickel




Polished Chrome

## Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens
LL45 Honeycomb Louvre
LLDF Diffusing Lens
LLFR Frosted Lens
LLLS Linear Spread Lens
LLHS Heavy Spread Lens

Copyright © 2026 Lucent Lighting Ltd.

## LED51/3-TW Factor and Wattage Information

All values given on page 1 and ies/ldt files are at the highest colour temperature. Use the below factors and wattages to calculate lumen output for other standard colour temperatures.

| | LED51/3-TW-6527 | | LED51/3-TW-4018 | |
|---|---|---|---|---|
| CCT | Lm Factor | System Wattage | Lm Factor | System Wattage |
| 6500K | 1.00 | 15.4 | | |
| 5000K | 1.06 | 14.7 | | |
| 4000K | 1.08 | 13.6 | 1.00 | 15.4 |
| 3000K | 0.83 | 15.4 | 0.90 | 13.6 |
| 2700K | 0.63 | 17 | 0.82 | 13.2 |
| 2400K | | | 0.76 | 13.5 |
| 2200K | | | 0.71 | 14 |
| 1800K | | | 0.59 | 15.1 |

## Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**DALI Type 6 requires two DALI addresses, one for CCT control the other for Intesisty control. DALI Type 8 is a single DALI Type 8 address for CCT and Intesisty control. Please check which control system is being used before specifying.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE