


## ProSpex Trim Round Accent



96mm (3.78") overall diameter. Range of soft appearance with minimal trim for achieving trimless effect. Family of matching products also available. Required depth height + 25mm<sup>^</sup>

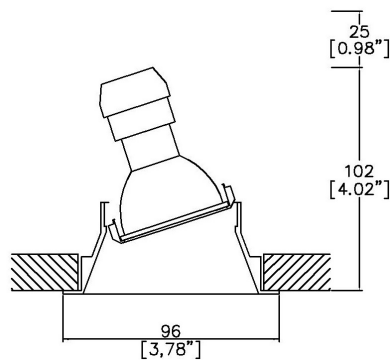

A963-GU  
Cut-out 83.5mm Ø

Light Source	GU10 Halogen GU10 LED
Max Power	50W (Halogen)
Lamp Base	GU10
Voltage	120v 50/60Hz
Insulation Class	I

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code:

A963-GU	-		-	
---------	---	--	---	--

Fixture  
A963-GU


Trim Round Accent with GU10

Finish  
WH  
BK  
RAL

White  
Black  
Custom RAL Colour\*

Ceiling Thickness

12      1/2"  
58      5/8"  
75      3/4"  
C        Custom




Honeycomb Louvre (LL45)



Solite/Diffusing Lens (LLDF)



Frosted Lens (LLFR)



Heavy Spread Lens (LLHS)



Linear Spread Lens (LLLS)



Warm Tone (LLCC)

Accessories Order Code:

Louvre/Lens

- LL45 Honeycomb Louvre
- LLCC Warm Tone Lens
- LLUV UV Lens
- LLDF Solite/Diffusing Lens
- LLFR Frosted Lens
- LLLS Linear Spread Lens
- LLHS Heavy Spread Lens

Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated may vary depending on lamp type used

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.


We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE



Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

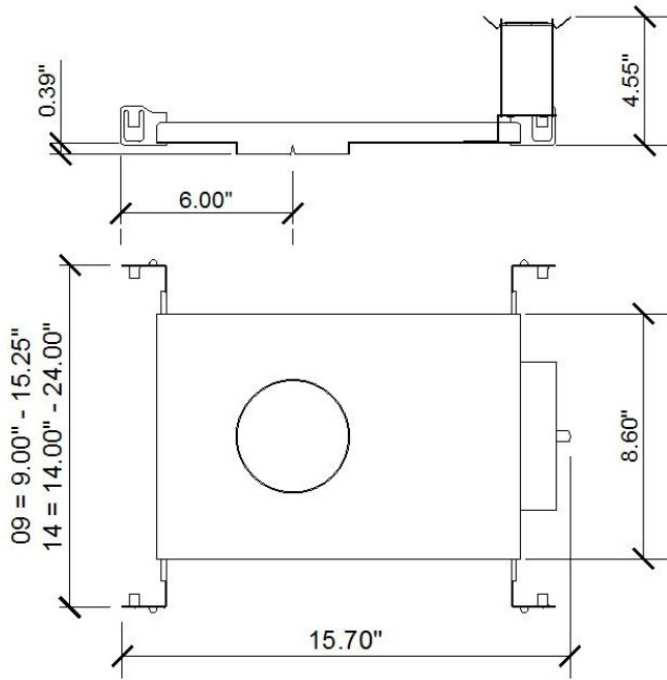

LMT-13-NIC

Tray Order Code:

LMT-13-NIC	-		-	GU	-	120
------------	---	--	---	----	---	-----

Housing Type

LMT-13-NIC	Lucent Mounting Tray, Non-Insulated Ceiling
------------	---

Mounting Hardware

09	9" to 15.25"
14	14" to 24"
36	28" to 36"
BB	Butterfly Bracket
CB	Caterpillar Bracket

Lamp


GU	GU10
----	------

Supply Voltage

120	120V
-----	------

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

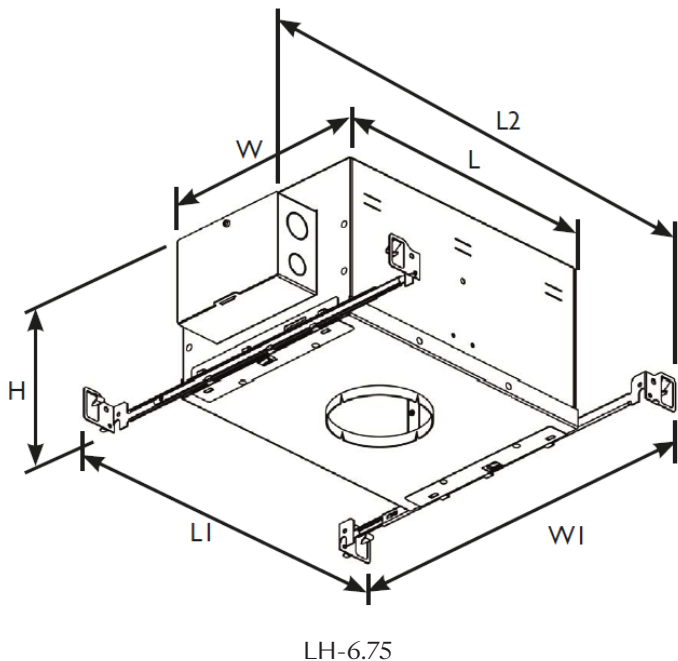

Housing Dimensions					
H	L	L1	L2	W	W1
6.75"	11.75"	14.95"	15.35"	8.75"	14" to 24"

Tray Order Code:

LH-6.75 - NIC - [ ] - GU - 120

Housing Type  
LH-6.75 Lucent Housing 6.75"

Housing Type  
NIC Non-Insulated Ceiling


Mounting Hardware  
09 9" to 15.25"  
14 14" to 24"  
36 28" to 36"  
BB Butterfly Bracket  
CB Caterpillar Bracket

Lamp  
GU GU10

Supply Voltage  
120 120V

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

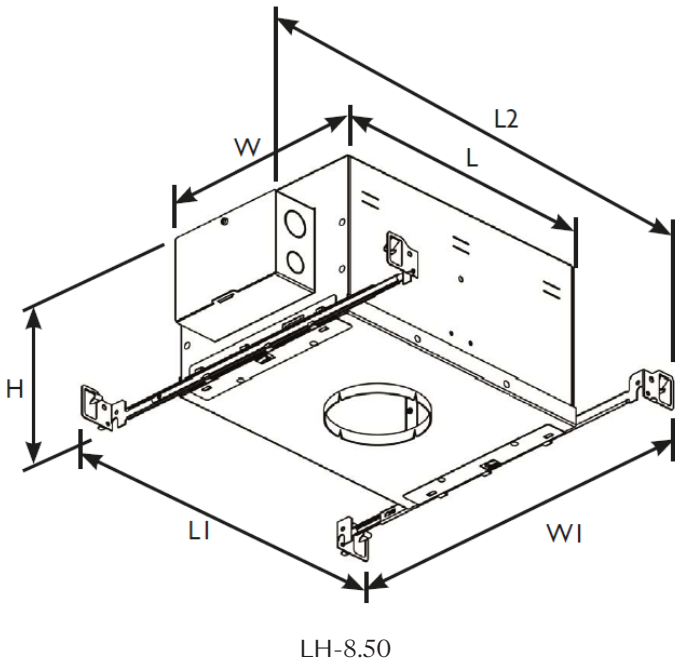

Housing Dimensions					
H	L	L1	L2	W	W1
8.50"	15.75"	18.95"	19.30"	12.00"	14" to 24"

Tray Order Code:

LH-8.50 - [ ] - [ ] - GU - 120

Housing Type  
LH-8.50      Lucent Housing 8.50"

Housing Type  
NIC      Non-Insulated Ceiling  
IC      Insulated Ceiling  
AT      Airtight Ceiling, CCEA

Mounting Hardware  
09      9" to 15.25"  
14      14" to 24"  
36      28" to 36"  
BB      Butterfly Bracket  
CB      Caterpillar Bracket

Lamp  
GU      GU10

Supply Voltage  
120      120V