


Voltage Drop Chart

A Power Supply (W)	B Distance From Power Supply to Feed-In (2 x 1.5mm)			
	5m	10m	20m	30m
	C Total track Length			
	(m)	(m)	(m)	(m)
60	50	50	50	50
100	50	50	40	25
150	50	40	20	Not Allowed
200	40	30	Not Allowed	Not Allowed
250	35	20	Not Allowed	Not Allowed



Wiring Schematic

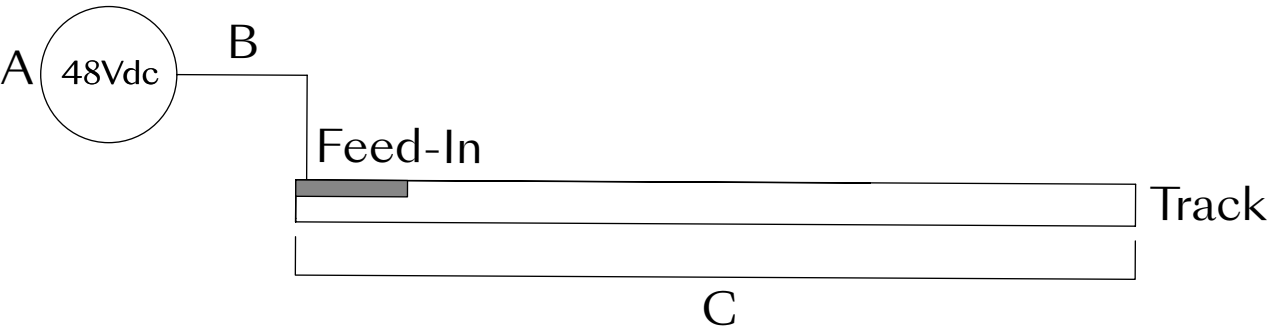

Use non-dimmable PSU, and connect control cables directly to the D+ and D- terminals of the tracks live feed.

Dimmable drivers integral to the yttings track adaptors.