

## Light efficiency:


**118 Lumen/Watt**

## Light quality:

**CRI: 91.5**

## Color temperature:

**3000 K**

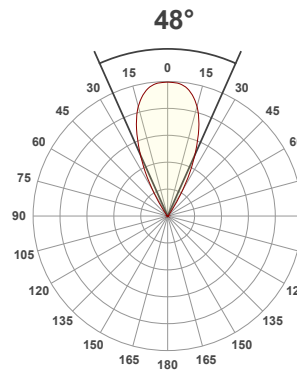

## Product name:

**TL603\_Q-HO-30-WFL - 350mA**


## Item number:

**TubeLED Mini Quantum HO  
Spotlight 3000K WFL - 350mA**


**Delivered information for above  
fixture and LED combination.**

**Output: 1657 Lumen   Peak intensity: 2780 cd   Power consumption: 14.0**


## CRI R values

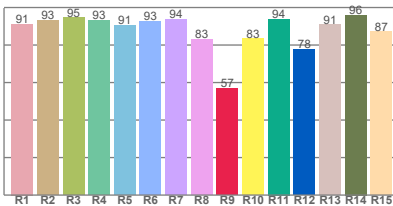

## TM30 C Values

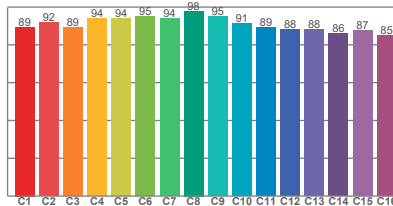


## Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	91.5	56.9	91.2	99.0	90.6	0.437	0.404	0.251	0.348	0.0037

## Beam details

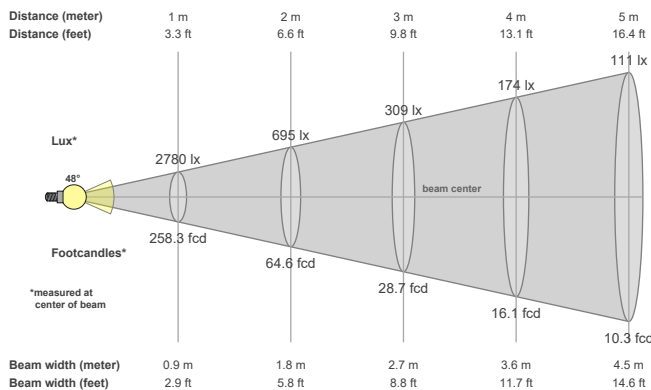

## Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
48°	67.1°	79.2°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
2780 cd	99.7%	98.5%

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2780lx	695lx	309lx	174lx	111lx	77lx	57lx	43lx	34lx	28lx	23lx	19lx	16lx	14lx	12lx	11lx	10lx	9lx	8lx	7lx
258.3fcd	64.6fcd	28.7fcd	16.1fcd	10.3fcd	7.2fcd	5.3fcd	4fcd	3.2fcd	2.6fcd	2.1fcd	1.8fcd	1.5fcd	1.3fcd	1.1fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website.

For information regarding other colour temperatures please refer to ies/ldt files available on the website.

### Light planning Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X      Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	18.1	18.6	18.2	18.8	19.0	18.1	18.6	18.2	18.8	19.0
	3H	17.8	18.5	18.2	18.7	18.8	17.8	18.5	18.2	18.7	18.8
	4H	17.7	18.4	18.1	18.6	18.8	17.7	18.4	18.1	18.6	18.8
	6H	17.7	18.3	18.0	18.6	18.9	17.7	18.3	18.0	18.6	18.9
	8H	17.7	18.2	18.0	18.5	18.9	17.7	18.2	18.0	18.5	18.9
	12H	17.6	18.1	18.0	18.5	18.9	17.6	18.1	18.0	18.5	18.9
4H	2H	17.7	18.4	18.1	18.6	18.8	17.7	18.4	18.1	18.6	18.8
	3H	17.6	18.1	18.0	18.5	18.9	17.6	18.1	18.0	18.5	18.9
	4H	17.5	18.0	17.9	18.4	18.9	17.5	18.0	17.9	18.4	18.9
	6H	17.4	17.9	17.9	18.3	18.6	17.4	17.9	17.9	18.3	18.6
	8H	17.4	17.8	17.9	18.2	18.5	17.4	17.8	17.9	18.2	18.5
	12H	17.3	17.7	17.8	18.1	18.6	17.3	17.7	17.8	18.1	18.6
8H	4H	17.3	17.8	17.9	18.2	18.5	17.3	17.8	17.9	18.2	18.5
	6H	17.3	17.6	17.8	18.1	18.6	17.3	17.6	17.8	18.1	18.6
	8H	17.3	17.6	17.8	18.1	18.7	17.3	17.6	17.8	18.1	18.7
	12H	17.3	17.5	17.8	18.0	18.6	17.3	17.5	17.8	18.0	18.6
12H	4H	17.3	17.7	17.8	18.1	18.5	17.3	17.7	17.8	18.1	18.5
	6H	17.3	17.5	17.8	18.1	18.7	17.3	17.5	17.8	18.1	18.7
	8H	17.2	17.5	17.8	18.0	18.6	17.2	17.5	17.8	18.0	18.6
Variation of the observer position for the luminaire distance S											
S = 1.0H		6.1 / -9.2					6.1 / -9.2				
S = 1.5H		8.8 / -11.0					8.8 / -11.0				
S = 2.0H		10.8 / -11.5					10.8 / -11.5				
Corrected glare indices referring to 1657 lm total luminous flux											