




## Soft70 Gen2 Fixed Trimless

TM65.2 11kgCO2e


TM66 2.5 CEAM




Ø70mm (2.76") overall trimless.  
Available with standard trim kit or 3 flush trim options, depending on ceiling type and finish.  
Family of matching products also available.

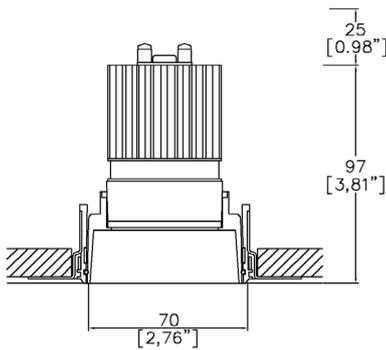

Soft70 Gen2 with Trimless Kit TL1<sup>(1)</sup> (front fitting, full skim)  
Cut-out Ø83mm (Ø3,26").  
Required depth height +25mm.

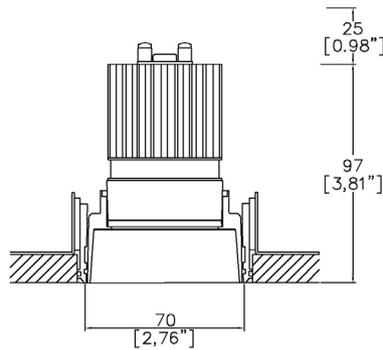

Soft70 Gen2 with Trimless Kit TL2<sup>(1)</sup> (rear fitting, partial skim)  
Cut-out Ø82mm (Ø3,22").  
Required depth height +25mm.

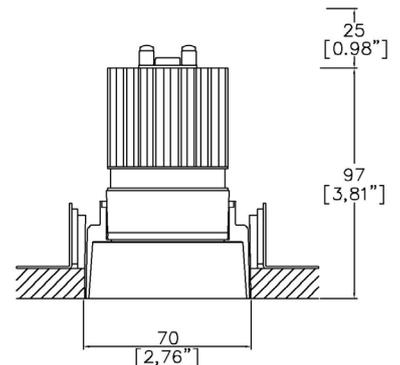

Soft70 Gen2 with Trimless Kit TL3<sup>(1)</sup> (rear fitting, solid ceiling)  
Cut-out Ø70mm (Ø2,75").  
Required depth height +25mm.

LED Source	LED51/Q-HO	LED51/Q-HO	LED51/Q-HO	LED51/Q-HO	LED51/Q-HO
CCT	3000K	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA	350mA
Power inc Driver	14W	14W	14W	14W	14W
Beam Angle	SP (12°)	NF (18°)	MF (25°)	FL (33°)	WFL (54°)
Delivered Lumens	1370	1790	1857	1822	1765
Delivered Intensity cd	17703	13939	10439	5094	2353
Delivered Lumens per circuit watt	98	128	132	130	126
Forward Volt	34V	34V	34V	34V	34V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI



Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 4000K x 1.02.

Project Ref: \_\_\_\_\_ Location Ref: \_\_\_\_\_

Please only complete one of the following code builders

### Non Fire Rated Code Builder

Fixture Order Code:  -  -  -  -

Fixture SF70200	Soft70 Gen2 Fixed for LED
Installation <sup>(1)</sup>	
TL1	Trimless for Full Skim
TL2	Trimless for Partial Skim ceilings (5-22mm total thickness)
TL3	Trimless for Solid Ceilings (5-22mm total thickness)
TL4 <sup>(2)</sup>	Trimless for Partial Skim ceilings (25-30mm total thickness)
TL5 <sup>(2)</sup>	Trimless for Solid Ceilings (25-30mm total thickness)
Finish	
WH03	White RAL 9016
BK01	Black RAL 9005
RAL*	Custom RAL Colour*
ABR1	Antique Brass
ABZ1	Antique Bronze
PCH1	Polished Chrome
PNK1	Polished Nickel
PBR1	Polished Brass
IP Rating	
20	IP20
54	IP54
65	IP65
Fire Rating	
0	No Fire Rating

### Fire Rated Code Builder

Fixture Order Code:  -  -  -  -

Fixture SF70200	Soft70 Gen2 Fixed for LED
Installation <sup>(1)</sup>	
TL1	Trimless for Full Skim
TL4 <sup>(2)</sup>	Trimless for Partial Skim ceilings (25-30mm total thickness)
Finish	
WH03	White RAL 9016
BK01	Black RAL 9005
RAL*	Custom RAL Colour*
ABR1	Antique Brass
ABZ1	Antique Bronze
PCH1	Polished Chrome
PNK1	Polished Nickel
PBR1	Polished Brass
IP Rating	
20	IP20
54	IP54
65	IP65
Fire Rating	
FR <sup>(3)</sup>	Fire Rated

(1) For any ceiling thickness or construction type not shown please contact Lucent

(2) Adjustment may be limited in thicker ceiling constructions. Refer to installation instructions for details.

(3) Tested and approved to EN 1363-1:2020 and EN 1365-2:2014 for 60 minutes Fire Rating.

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Module Order Code:  -  -

LED  
LED51/Q-HO      LED50 ONE QUANTUM High Output

CCT  
27                    2700K  
30                    3000K  
40 (4)               4000K

Beam  
SP                   Spot  
NF                   Narrow Flood  
MF                   Medium Flood  
FL                   Flood  
WFL                  Wide Flood

(4) contact Lucent for availability




Driver Options:

Protocol  
S                    Non-Dim  
A                    Analogue (0-10v)  
P                    Phase  
D                    DALI  
B                    Bluetooth\*\*

Emergency Options:

Emergency  
E                    Maintained 3hr Emergency  
ED                   Maintained 3hr DALI Self Test  
ES                   Maintained 3hr Self Test

## Installation Kits

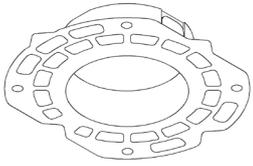

TL1 Trimless Kit, full skim TL2 Trimless Kit, partial skim TL3 Trimless Kit, solid ceiling

## Finish selection




Antique Brass



Antique Bronze



Polished Brass




Polished Nickel



Polished Chrome

## Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

- Louvre/Lens
- LL45 Honeycomb Louvre
- LLDF Diffusing Lens
- LLFR Frosted Lens
- LLLS Linear Spread Lens
- LLHS Heavy Spread Lens

## Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.