

Light efficiency:


62 Lumen/Watt

Light quality:

CRI: 92.8

Color temperature:

3000 K

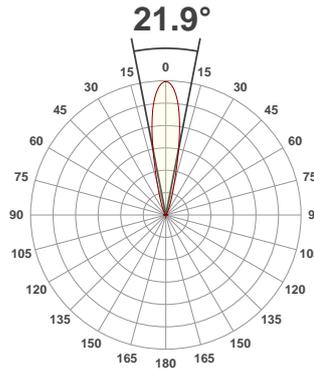

Product name:

**Edge90 Fixed_Accent -LED50
ONE GEN2, 3000K, 24°,
350mA**


Item number:

91413-F/A - LED51/2-30-24-350mA


**Delivered information for above
fixture and LED combination.**

Output: 847 Lumen Peak intensity: 4613 cd Power consumption: 13.6


CRI R values

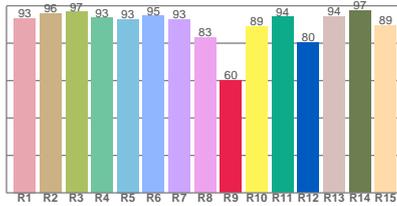

TM30 C Values

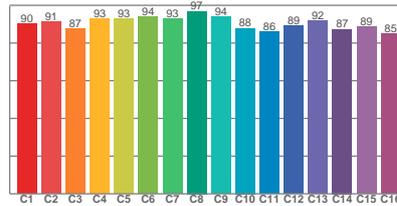


Color vector graphics



| Color temperature | Color rendering index | Red component | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|---------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | x | y | u | v | Δuv |
| 3000 K | 92.8 | 60.1 | 90.5 | 100.4 | 90.4 | 0.437 | 0.404 | 0.249 | 0.346 | -0.0011 |

Beam details

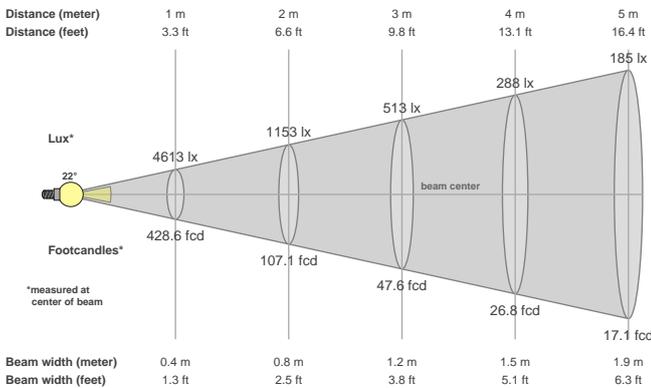

Beam angles

| Beam angle 50% | Field angle 10% | Cutoff angle 2,5% |
|----------------|-----------------|-------------------|
| 21.9° | 41.1° | 59.6° |

Beam intensities

| Peak intensity | Int. ratio in 120° cone | Int. ratio in 90° cone |
|----------------|-------------------------|------------------------|
| 4613 cd | 99.4% | 98.4% |

Beam intensities from 1-20m

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | 11m | 12m | 13m | 14m | 15m | 16m | 17m | 18m | 19m | 20m |
|----------|----------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 3.3ft | 6.6ft | 9.8ft | 13.1ft | 16.4ft | 19.7ft | 23ft | 26.2ft | 29.5ft | 32.8ft | 36.1ft | 39.4ft | 42.7ft | 45.9ft | 49.2ft | 52.5ft | 55.8ft | 59.1ft | 62.3ft | 65.6ft |
| 4613lx | 1153lx | 513lx | 288lx | 185lx | 128lx | 94lx | 72lx | 57lx | 46lx | 38lx | 32lx | 27lx | 24lx | 21lx | 18lx | 16lx | 14lx | 13lx | 12lx |
| 428.6fcd | 107.1fcd | 47.6fcd | 26.8fcd | 17.1fcd | 11.9fcd | 8.7fcd | 6.7fcd | 5.3fcd | 4.3fcd | 3.5fcd | 3fcd | 2.5fcd | 2.2fcd | 1.9fcd | 1.7fcd | 1.5fcd | 1.3fcd | 1.2fcd | 1.1fcd |

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

- 2700K = 1
- 3500K = 1
- 4000K = 1.084